

Visual Comparison of Landscape Type



BASE/

Client: CopperString 2.0
Reference: J0XXX

Document Issue

Issue	Date	Prepared By
	30/07/2021	Jack Caleo

Contents

Line 1: Renewable Energy Hub 5

Line 2: CopperString Core 61

Line 3: Mt Isa Augmentation 88

Line 4: Southern Connection..... 109

Line 5: Woodya Connection 125

This document is a visual comparison of landscapes which was compiled to provide a photographic record both from an aerial and site-based perspective along each of the five corridor selection segments. This ground truthing was utilised to inform the projects appreciation of the six general landscape types which occur across the study area as well as improved confidence in the potential conservation significant species habitat mapped for the CopperString EIS 2.0. It has also been used to confirm expected disturbance associated with construction related activities.

Six general landscape types occur across the study area. These have been based on mapped remnant broad vegetation groups (BVG) and other features such as watercourses. The landscape types have been identified for the purposes of discerning impacting activities along the corridor selection, and include:

- Open forest to open woodland (eucalypt/melaleuca/belah dominated) on flat to undulating plains
- Riparian zone and fringing vegetation along ephemeral channels, watercourses and channelised floodplains
- Low open woodland to wooded spinifex grassland (eucalypt/acacia dominated) on slopes, crests and scarps
- Mixed low woodland with spinifex (gidgee/mulga/eucalypt dominated) on plains
- Tussock/hummock grassland
- Cleared grazing land with scattered trees.

Each photograph also refers to the constructor's evaluation of vegetation method and that is predicted to be encountered. These are further described below.

Heavy	Medium	Light	Very Light
Pushing Down Trees / Dozing / Grading/ Mulching / Windrowing Densely Wooded – Tree Girths > 150mm; Density < 5m	Pushing Down Trees / Grading / Mulching / Windrowing Wooded - Tree Girths <150mm; Density > 5m Spacing, Dense Shrubs – Excavator; Density < 2m	Grader Skimming Tractor Slashing Grasslands; (to a height of 1m); Densely Packed < 1m, Small Shrubs (to a height of 1.5m); Branch thickness<75mm; Density 10m to 2m	Tractor Slashing Grasslands; (to a height of 1m); Sparsely packed > 1m

Line 1: Renewable Energy Hub


Woodstock to Flinders

Line 1 KP 9.7 WD (65,0,35,0) Koala survey point (GHD) (blue) near Tower 615
(419.63m between towers 614-615)




This section is described as 65% very light, 0% light, 35% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 15m. Observations on the ground reflect the clearing contractor's description within this section of the alignment

Line 1 KP 10.5 WD (65,0,35,0) Koala survey point (GHD) (blue) near Tower 613
(650.55m between towers 612-613)

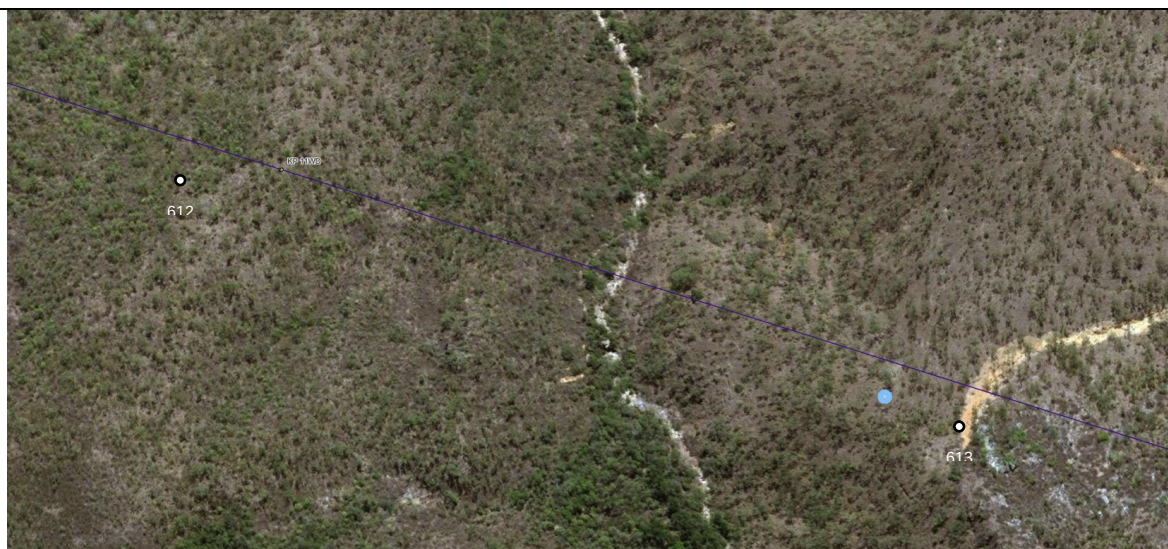


This section is described as 65% very light, 0% light, 35% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse west of the survey point. The mid-dense canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 22.3 WD (5,0,25,70) Koala survey point (BAAM) (blue) near Tower 586
(504.57.13m between towers 585-586)

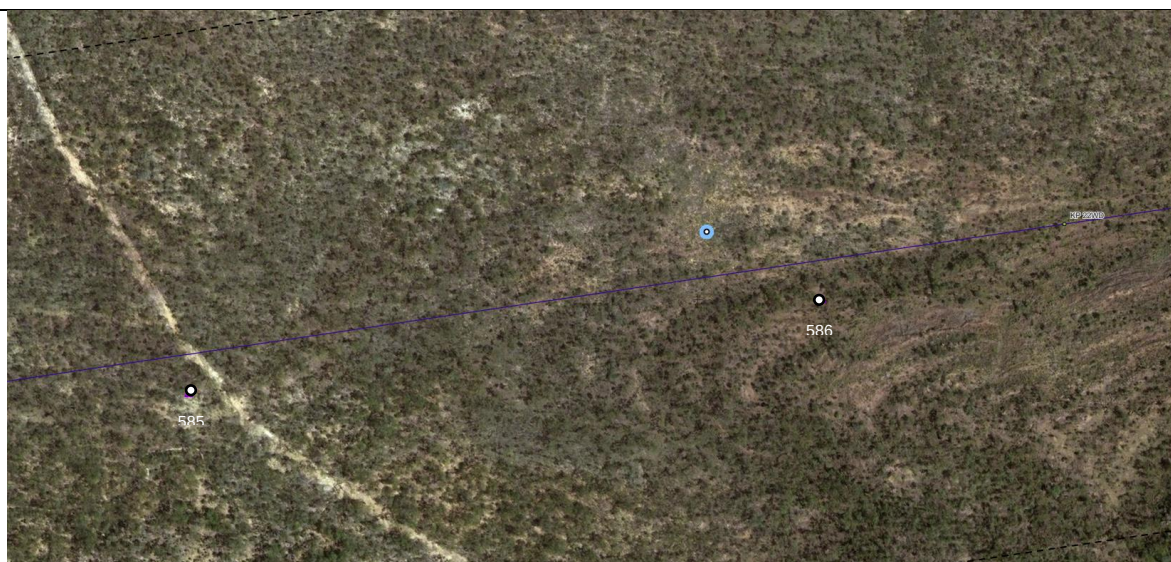


This section is described as 5% very light, 0% light, 25% moderate and 70% heavy by the clearing contractor. Field observations show a sparse to mid-dense canopy covers most of this section with tree heights averaging at 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 28.9 WD (10,0,40,40) Koala survey point (BAAM) (blue) near Tower 571
(469.13m between towers 570-571)

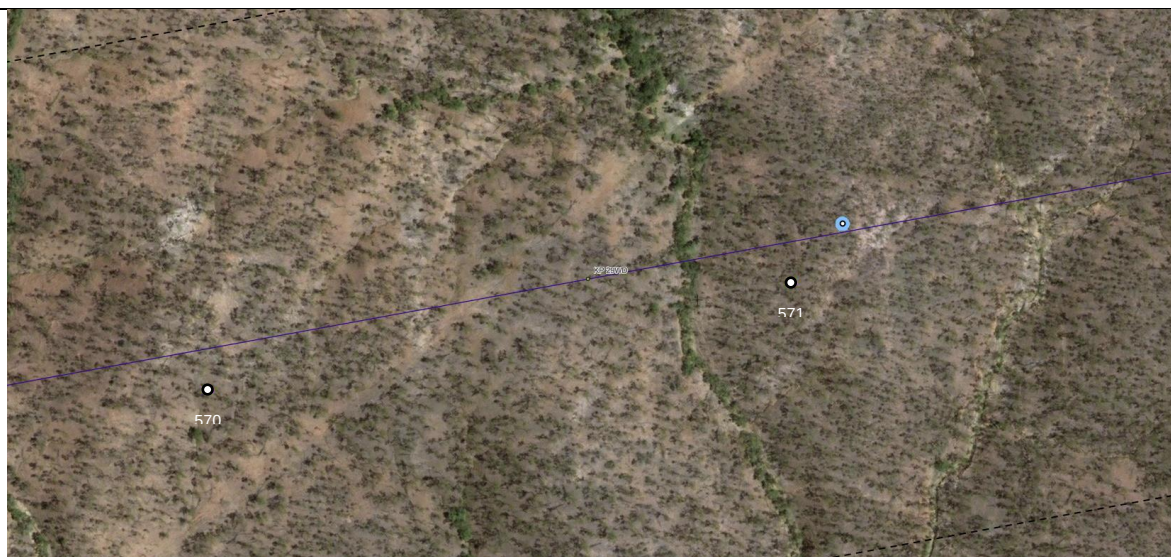


This section is described as 10% very light, 0% light, 40% moderate and 40% heavy by the clearing contractor. Field observations show a riparian woodland along a 20m wide watercourse west of the survey point. The mid-dense canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 47.5 WD (40,0,50,10) Koala survey point (BAAM) (blue) near Tower 530
(493.02m between towers 530-531)

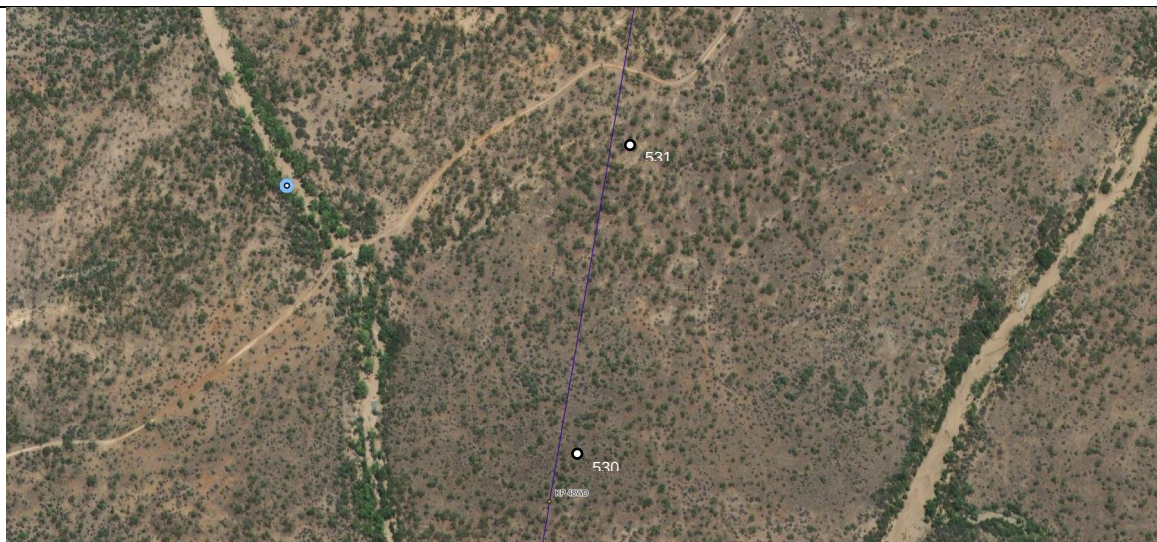

This section is described as 40% very light, 0% light, 50% moderate and 10% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 16m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 64.8 WD 6.7km south (50,10,40,0) Koala survey point (BAAM) (blue) near Tower 493
(458.98m between towers 492-493)

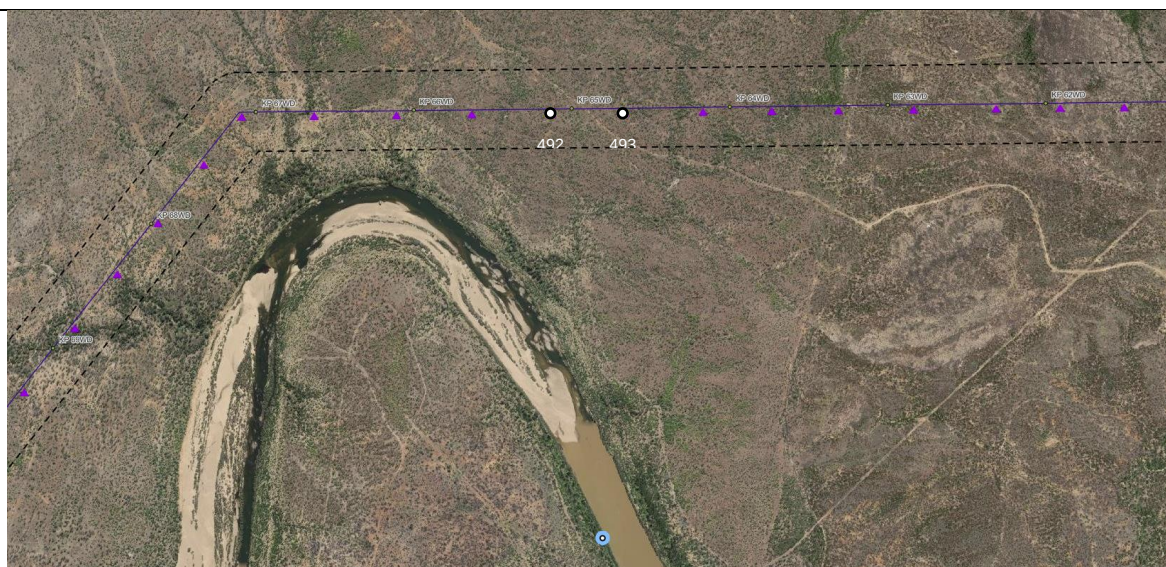


This section is described as 50% very light, 10% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 400m wide watercourse on the survey point south of the alignment. The mid-dense canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 18m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 72.7 WD (70,20,10,0) Koala survey point (BAAM) (blue) near Tower 476
(462.74m between towers 475-476)



This section is described as 70% very light, 20% light, 10% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers a riparian woodland along a gully line and most of this section with tree heights averaging at 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 74.5 WD (60,10,30,0) Koala survey point (BAAM) (blue) near Tower 472
(547.58m between towers 471-472)

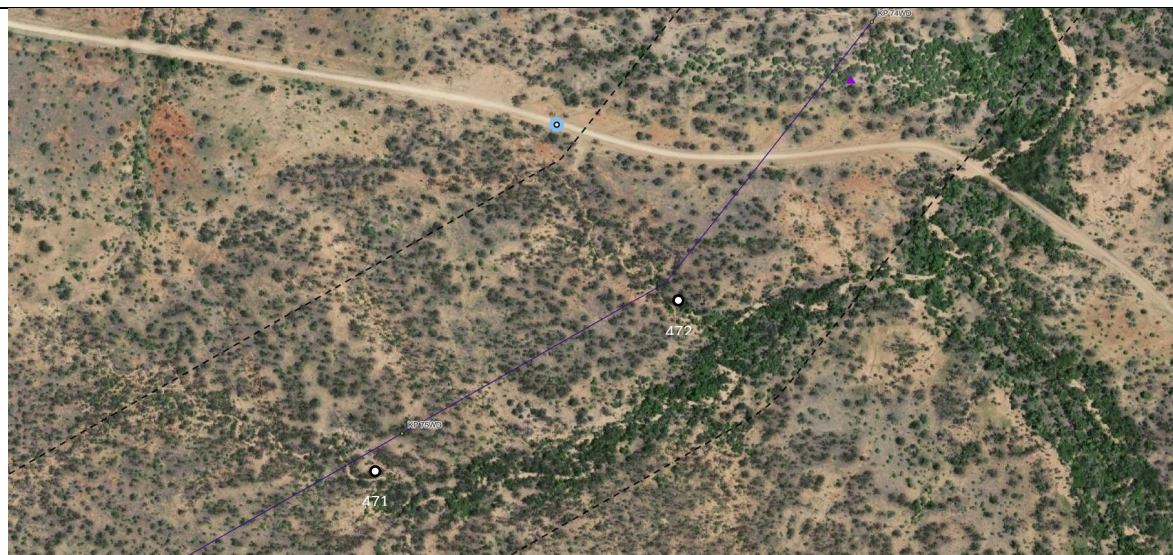


This section is described as 50% very light, 10% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 15m wide watercourse southeast of the survey point. The mid-dense canopy covers the riparian canopy that fringes the watercourse and gully line within this section, as well as most of this section with tree heights averaging at 11m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 92.1 WD (50,0,40,10) Koala survey point (BAAM) (blue) near Tower 441
(440.68m between towers 440-441)




This section is described as 50% very light, 0% light, 40% moderate and 10% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 95.8 WD (70,20,10,0) Koala survey point (BAAM) (blue) near Tower 434
(599.60m between towers 433-434)

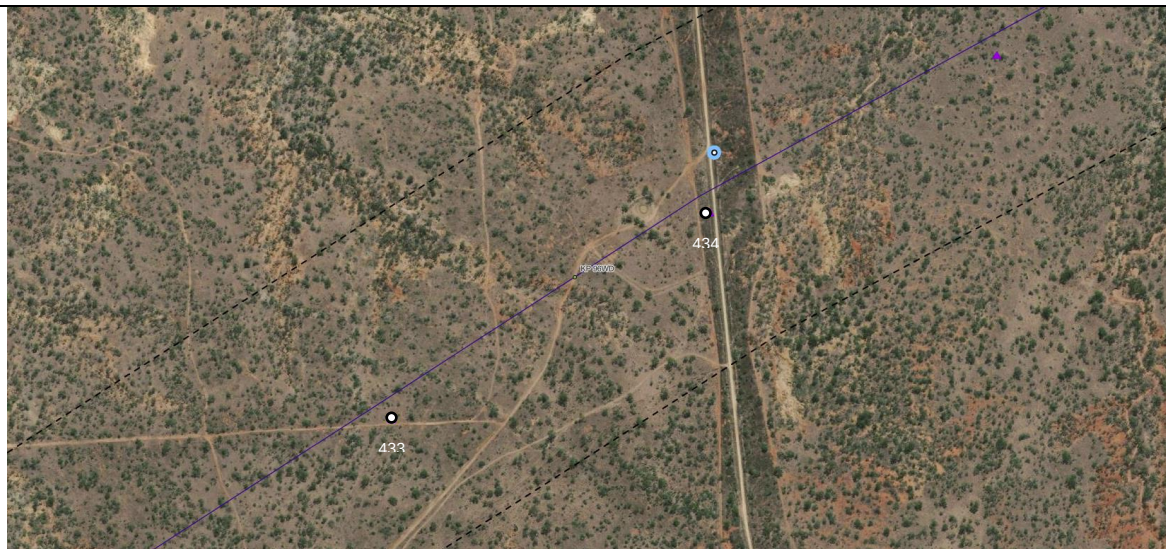


This section is described as 70% very light, 20% light, 10% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of this section. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 101 WD (30,20,50,0) Koala survey point (BAAM) (blue) near Tower 425
(395.99m between towers 424-425)

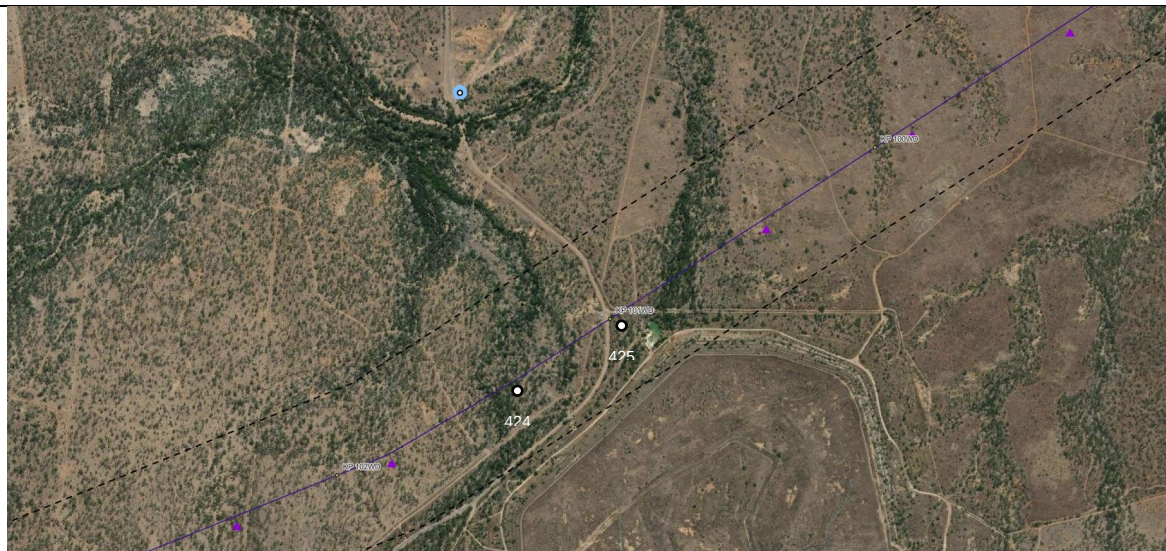


This section is described as 30% very light, 20% light, 50% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse west of the tower 424. The mid-dense canopy covers the riparian canopy that fringes the watercourse and most of the west section. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 119.4 WD (60,10,20,10) Koala survey point (BAAM) (blue) near Tower 392
(594.82m between towers 391-392)

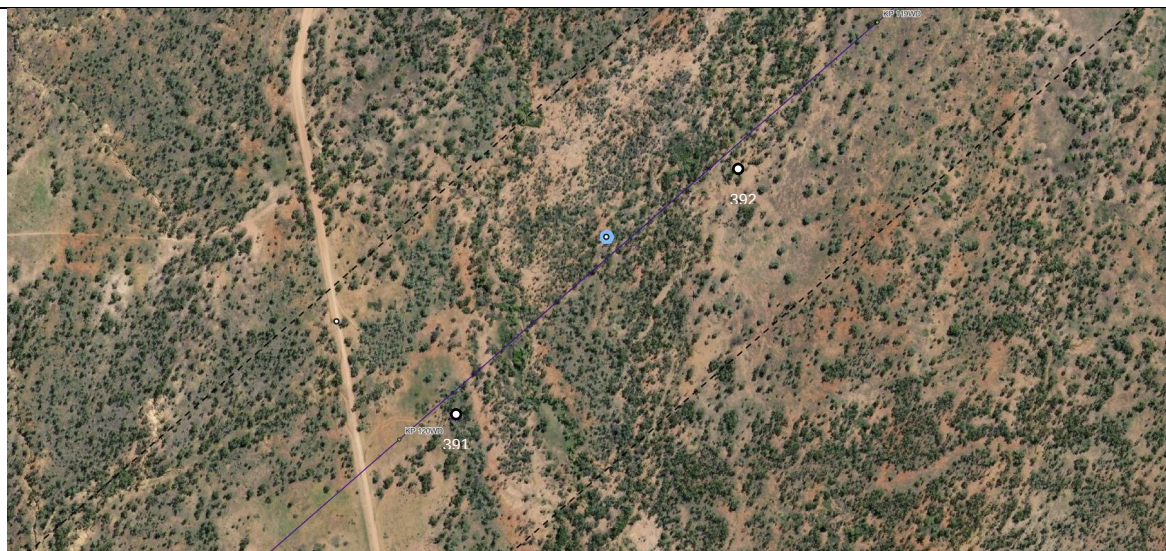


This section is described as 60% very light, 10% light, 20% moderate and 10% heavy by the clearing contractor. Field observations show a mid-dense canopy covers the riparian canopy that fringes the gully lines and most of this section with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 131.4 WD (40,40,20,0) Koala survey point (BAAM) (blue) near Tower 370
(402.35m between towers 369-370)

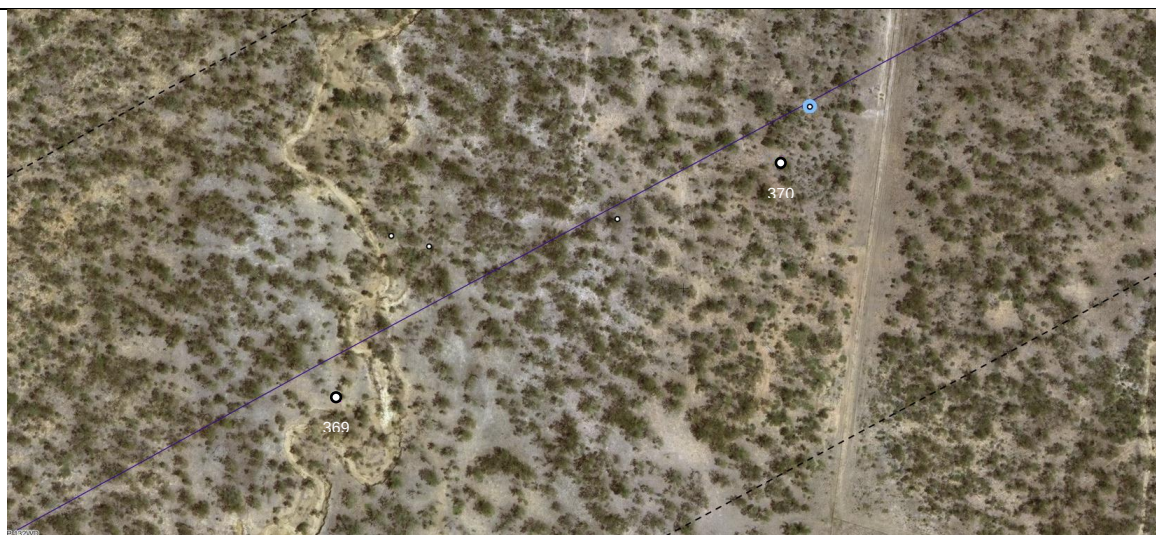


This section is described as 40% very light, 40% light, 20% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 20m wide watercourse west of survey point. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and most of the section with tree heights averaging at 12m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 139.1 WD (40,40,20,0) Koala survey point (BAAM) (blue) near Tower 356
(587.56m between towers 355-356)

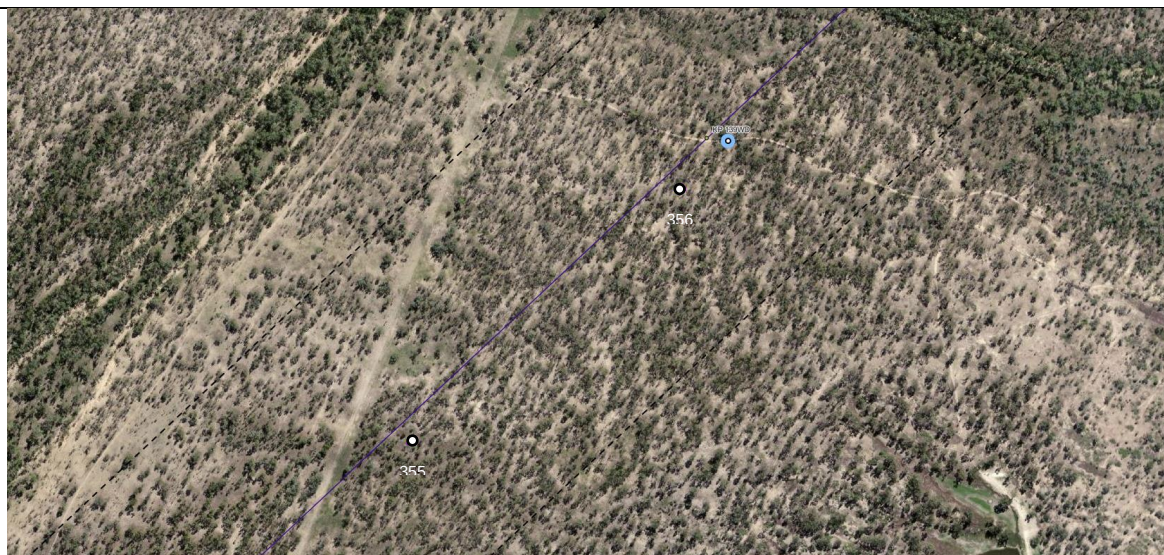


This section is described as 40% very light, 40% light, 20% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of the section with tree heights averaging at 13.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 150.2 WD (80,0,20,0) Koala survey point (GHD) (blue) near Tower 336
(580.25m between towers 335-336)

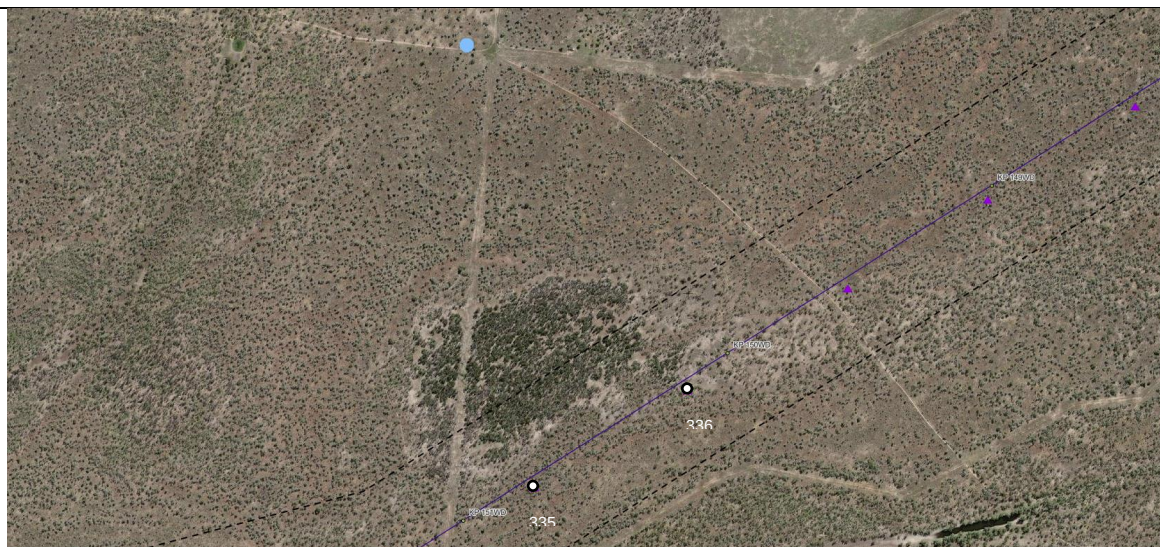


This section is described as 80% very light, 0% light, 20% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of this section with tree heights averaging at 8m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 161.1 WD (60,10,30,0) Koala survey point (GHD) (blue) near Tower 330
(604.23m between towers 329-330)

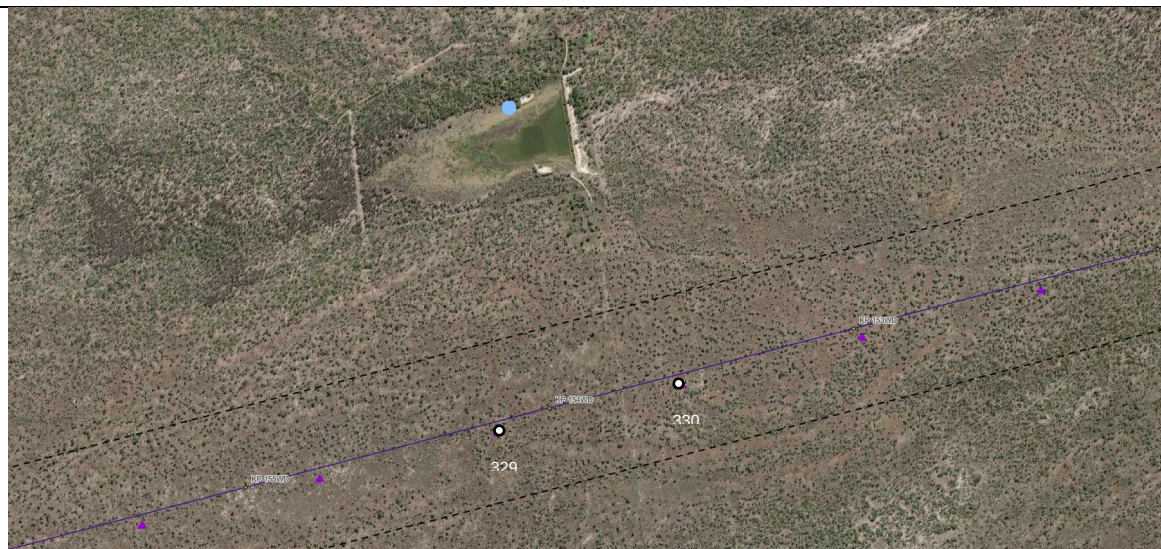


This section is described as 60% very light, 10% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of this section with tree heights averaging at 13m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 158.4 WD (70,10,20,0) Koala survey point (BAAM) (blue) near Tower 322
(594.51m between towers 321-322)

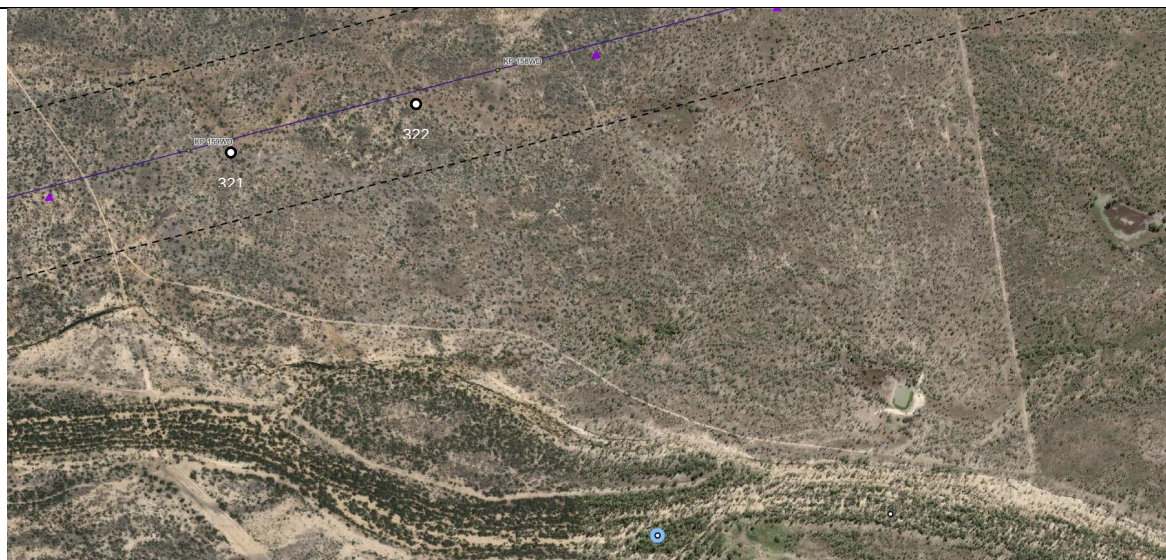

This section is described as 70% very light, 10% light, 20% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of the section with tree heights averaging at 9.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 161.1 WD (20,10,50,20) Koala survey point (GHD) (blue) near Tower 317
(633.58m between towers 316A-317)

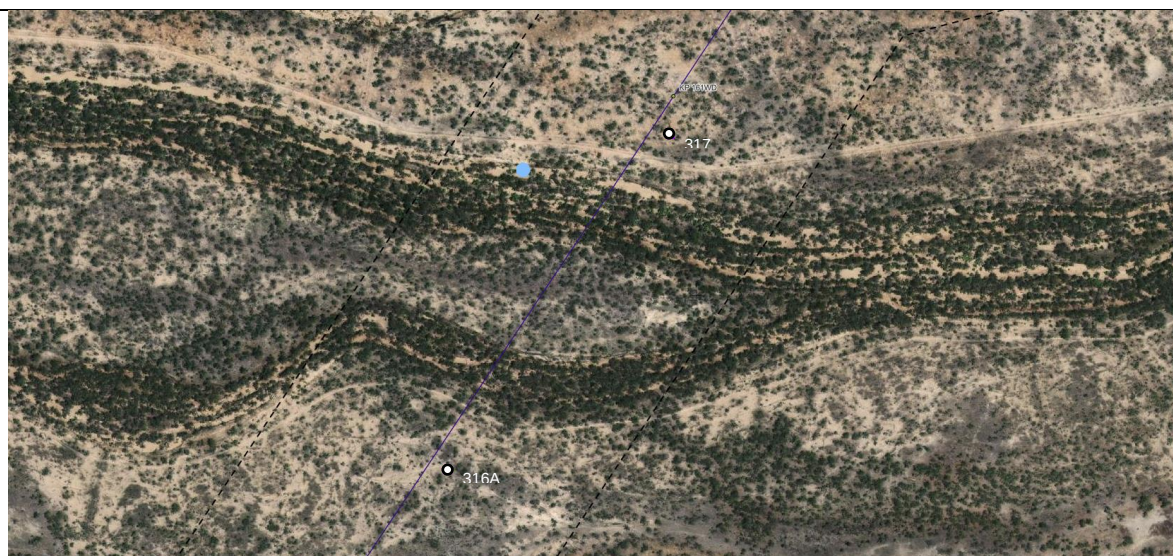

This section is described as 20% very light, 10% light, 50% moderate and 20% heavy by the clearing contractor. Field observations show riparian woodlands along a braided 140m and 100m wide watercourse south of the survey point. The sparse canopy covers the riparian canopies that fringes both the watercourse and most of this section with tree heights averaging at 16.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 168.2 WD (80,10,10,0) Koala survey point (GHD) (blue) near Tower 305
(587.97m between towers 304-305)




This section is described as 80% very light, 10% light, 10% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of this section with tree heights averaging at 10m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 175.3 WD (40,0,40,20) Koala survey point (GHD) (blue) near Tower 293
(580.00m between towers 292-293)




This section is described as 40% very light, 0% light, 40% moderate and 20% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse south of the survey point. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 12m. Observations on the ground reflect the clearing contractor's description within this section of the alignment

Line 1 KP 180.3 WD (70,20,10,0) Koala survey point (GHD) (blue) near Tower 305
(564.14m between towers 283-284)

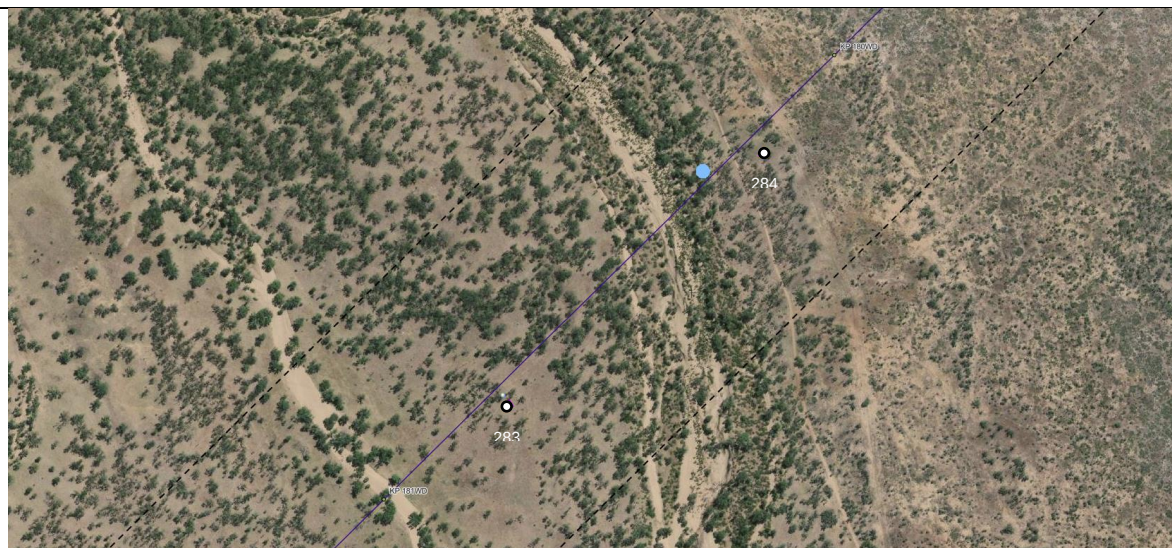


This section is described as 70% very light, 20% light, 10% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along an 80m wide watercourse west of the survey point. The sparse canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 15m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 200 WD (40,0,60,0) Koala survey point (GHD) (blue) near Tower 249
(600.52m between towers 248-249)

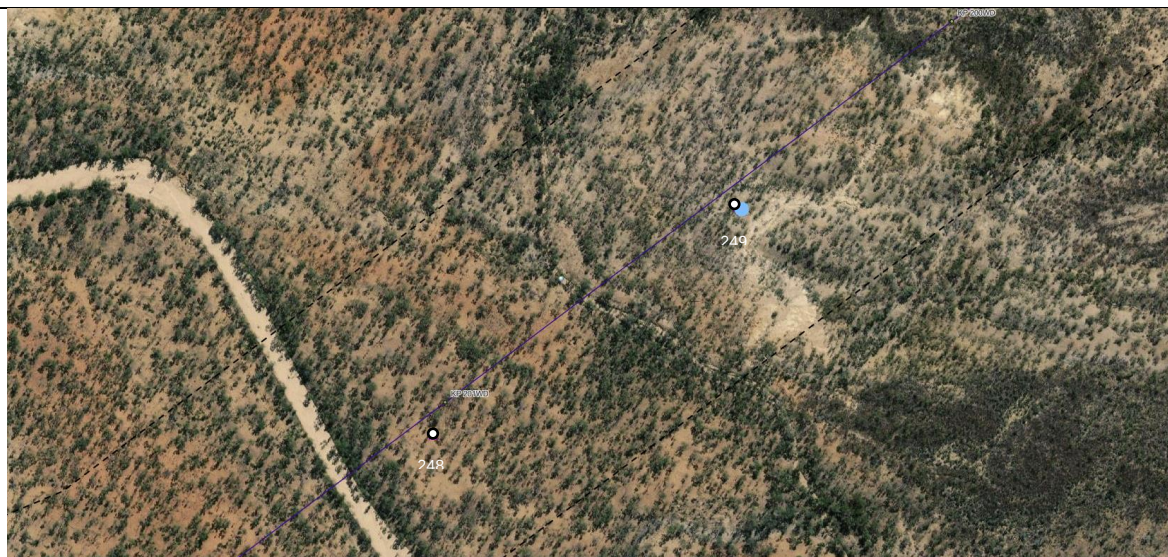


This section is described as 40% very light, 0% light, 60% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 20m wide watercourse south of the survey point. The mid-dense canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 212.1 WD (30,30,0,40) Koala survey point (GHD) (blue) near Tower 229
(591.72m between towers 228-229)

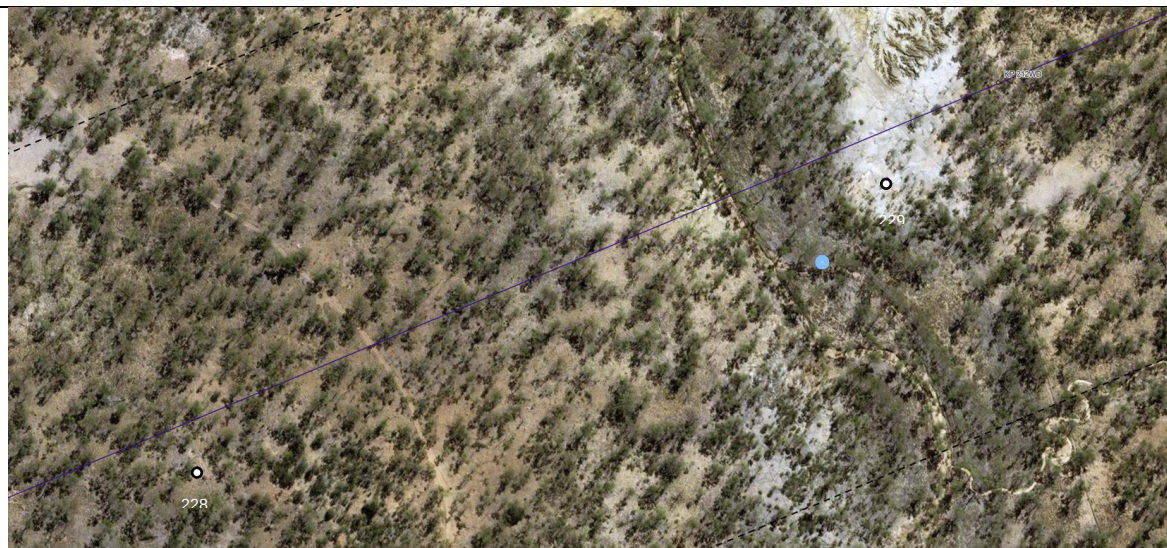

This section is described as 30% very light, 30% light, 0% moderate and 40% heavy by the clearing contractor. Field observations show a riparian woodland along a 15m wide watercourse west of the survey point. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 12m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 216.3 WD (30,0,70,0) Koala survey point (BAAM) (blue) near Tower 222
(559.30m between towers 221-222)

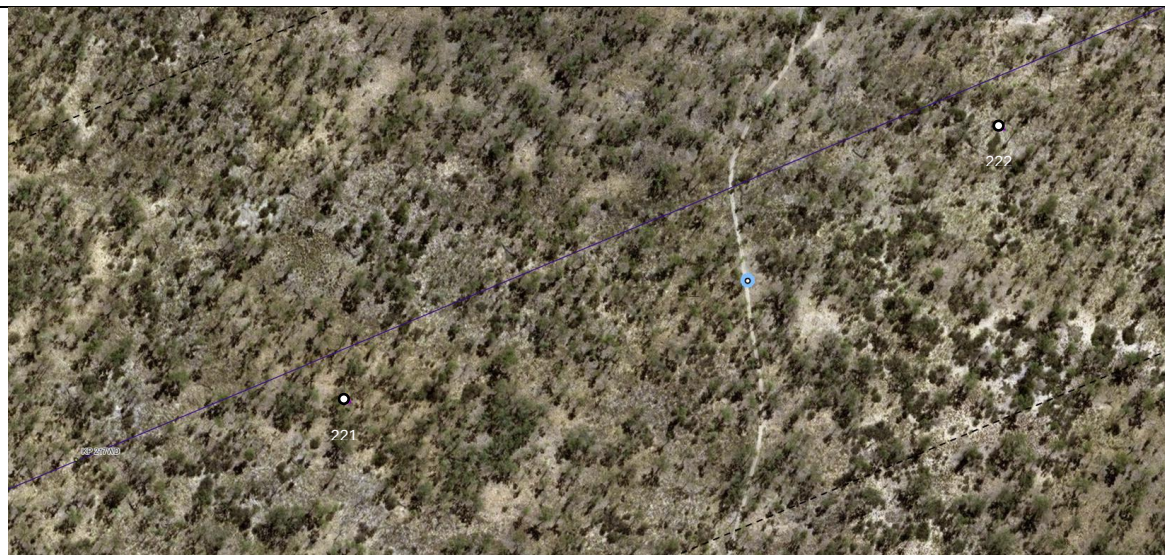


This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of the section with tree heights averaging at 10m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 222.6 WD (20,0,60,20) Quaternary point (green) near Tower 211
(612.96m between towers 210-211)




This section is described as 20% very light, 0% light, 60% moderate and 20% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 10m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 226.7 WD (30,0,70,0) Quaternary point (green) near Tower 204
(584.30m between towers 203-204)

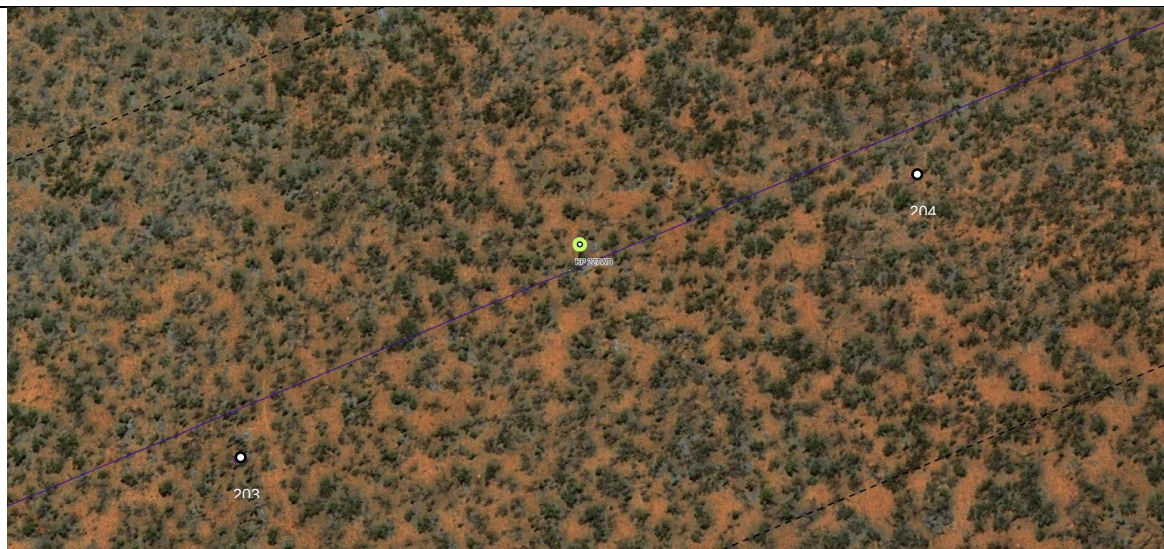

This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 10m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 230.3 WD (30,0,70,0) Quaternary point (green) near Tower 198
(584.30m between towers 197-198)

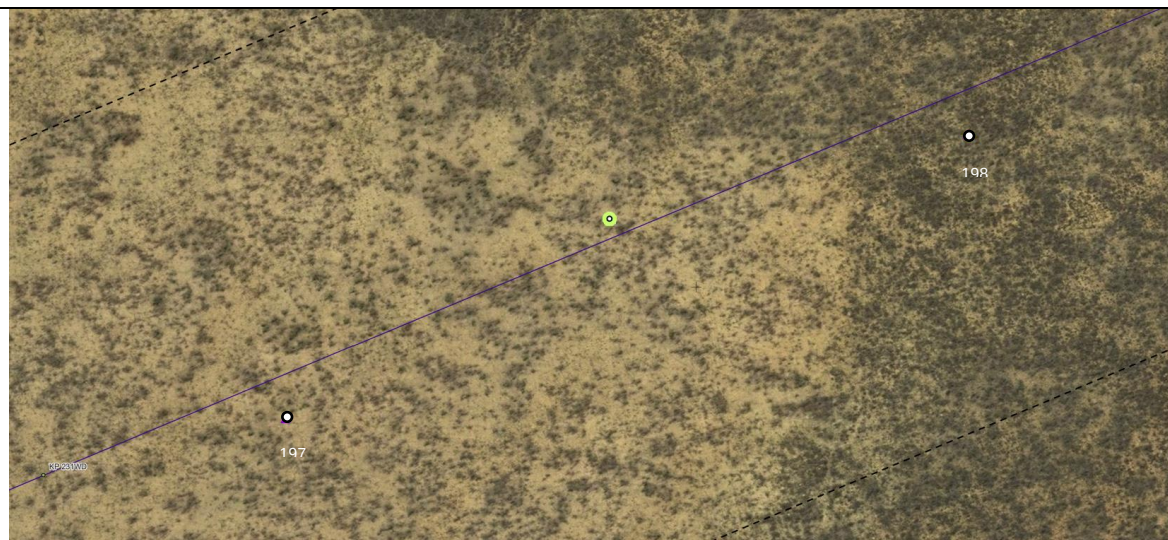

This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section especially towards the east tower with tree heights averaging at 4m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 233.7 WD (30,0,70,0) Access track (yellow) near Tower 192
(568.77m between towers 191-192)



This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 10m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 238 WD (30,0,70,0) Access track (yellow) near Tower 185
(589.20m between towers 184-185)



This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 12m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 240.8 WD (30,0,70,0) Quaternary point (green) near Tower 180
(594.79m between towers 179-180)



This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 12m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 247.5 WD (20,0,50,30) Riparian zone (red) near Tower 169
 (596.26m between towers 168-169) (Major Risk (Purple) DAF – WWBW)




This section is described as 20% very light, 0% light, 50% moderate and 30% heavy by the clearing contractor. Field observations shows a riparian woodland along an 83m wide watercourse. Tree heights ranged up to 18m. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and most of the west section with tree heights averaging around 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 248.5 WD (40,0,60,0) Quaternary point (green) near Tower 167
(502.21m between towers 166-167)



This section is described as 40% very light, 0% light, 60% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 15m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 249.1 WD (30,0,70,0) Quaternary point (green) near Tower 166
(488.91m between towers 165-166)

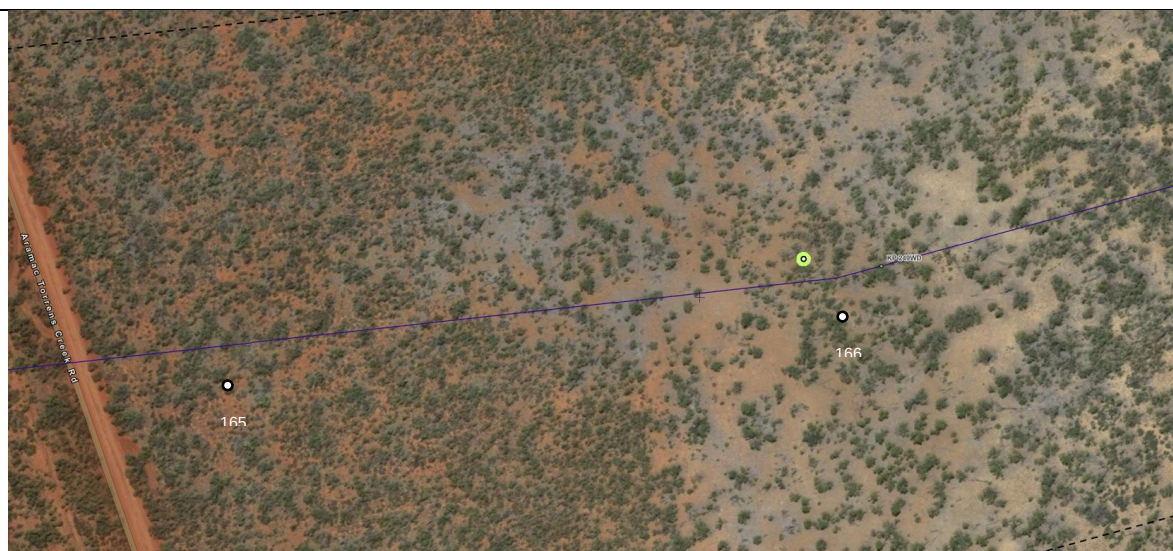


This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section especially towards the west section with tree heights averaging at 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 252.4 WD (30,0,70,0) Quaternary point (green) near Tower 160
(595.80m between towers 159-160)




This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 11m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 255.2 WD (30,0,70,0) Access track (yellow) near Tower 155
(585.06m between towers 154-155)

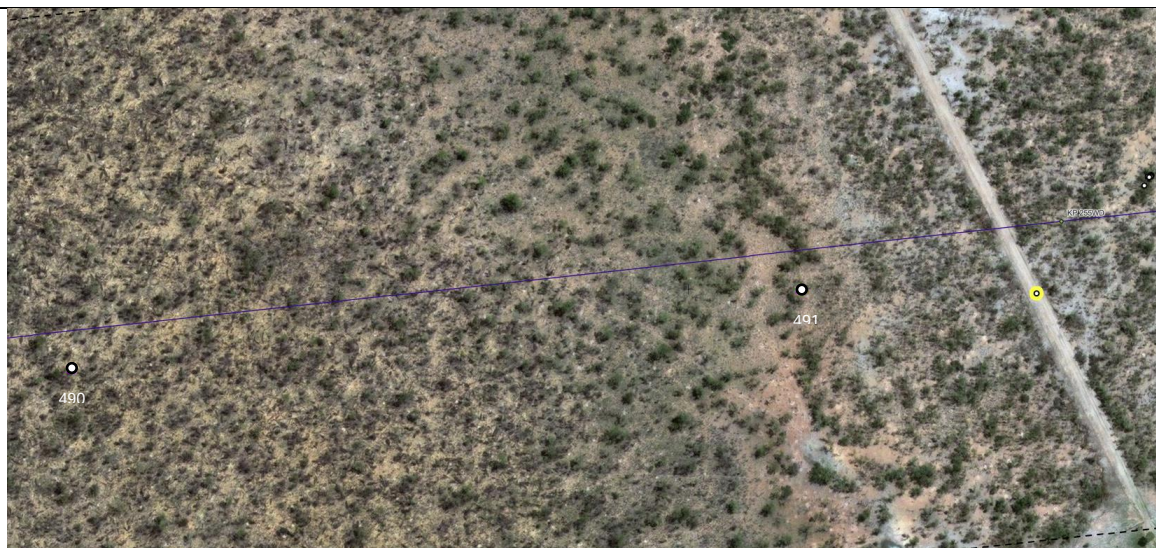


This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 262.8 WD (40,30,30,0) Quaternary point (green) near Tower 142
(571.37m between towers 141-142)

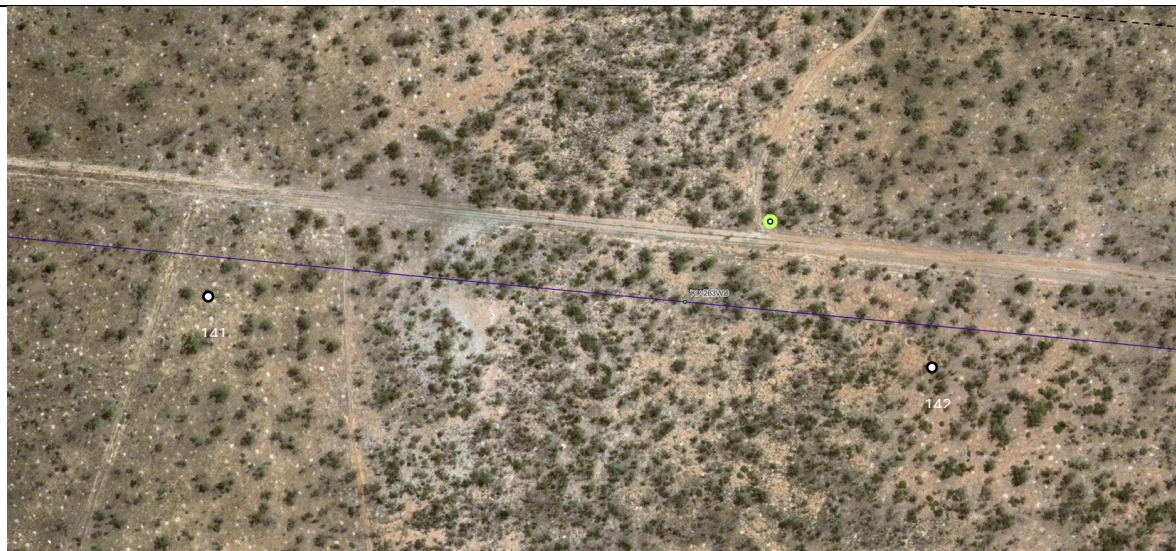


This section is described as 40% very light, 30% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of this section with tree heights averaging at 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 266.3 WD (40,30,30,0) Koala survey point (BAAM) (blue) near Tower 136
(535.39m between towers 135-136)

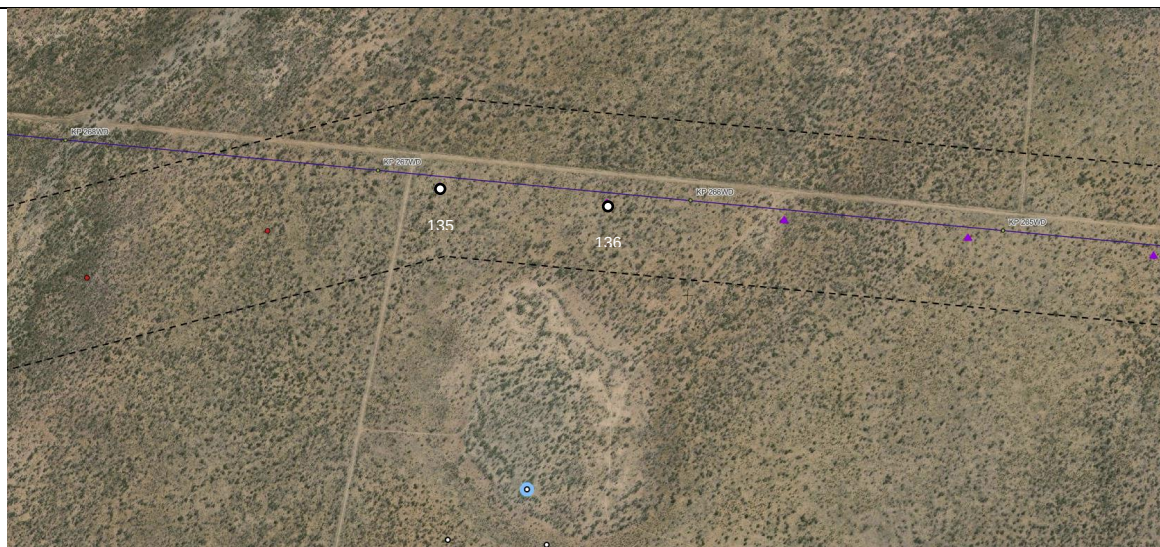


This section is described as 40% very light, 30% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of the section with tree heights averaging at 10m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 272 WD (40,20,40,0) Koala survey point (GHD) (blue) near Tower 127
(605.07m between towers 126-127)

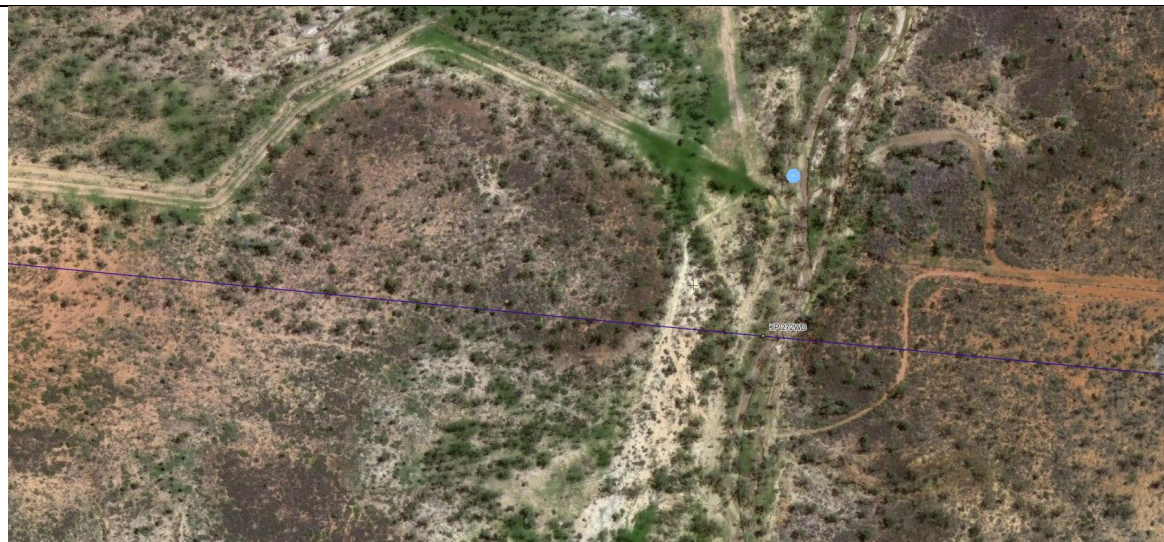

This section is described as 40% very light, 20% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 15m wide braided watercourse on the survey point. The sparse to mid-dense canopy covers the riparian canopies that fringe the watercourses and most of this section with tree heights averaging at 16.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 280 WD (50,0,40,10) Quaternary point (green) near Tower 114
(599.61m between towers 113-114)

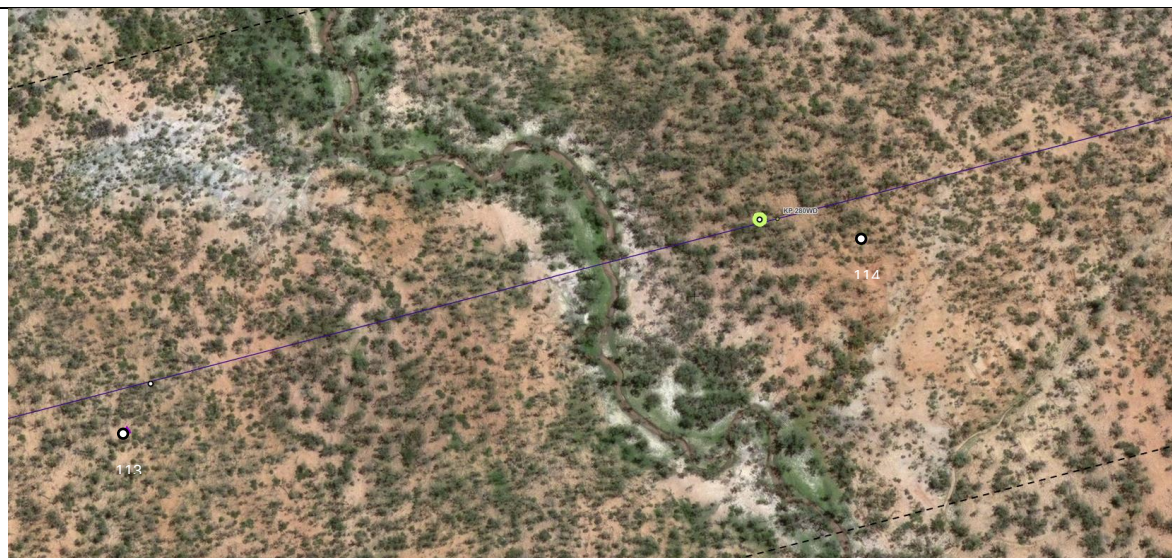


This section is described as 50% very light, 0% light, 40% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along an 10m wide watercourse west of the quaternary point. The sparse canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 12m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 284.6 WD (20,0,30,50) Quaternary point (green) near Tower 106
(574.01m between towers 105-106)



This section is described as 20% very light, 0% light, 30% moderate and 50% heavy by the clearing contractor. Field observations show a sparse to mid-dense canopy covers most of the section towards the east tower with tree heights averaging at 11m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.


Line 1 KP 289.3 WD (50,10,40,0) Koala survey point (GHD) (blue) near Tower 98
(549.08m between towers 97-98)

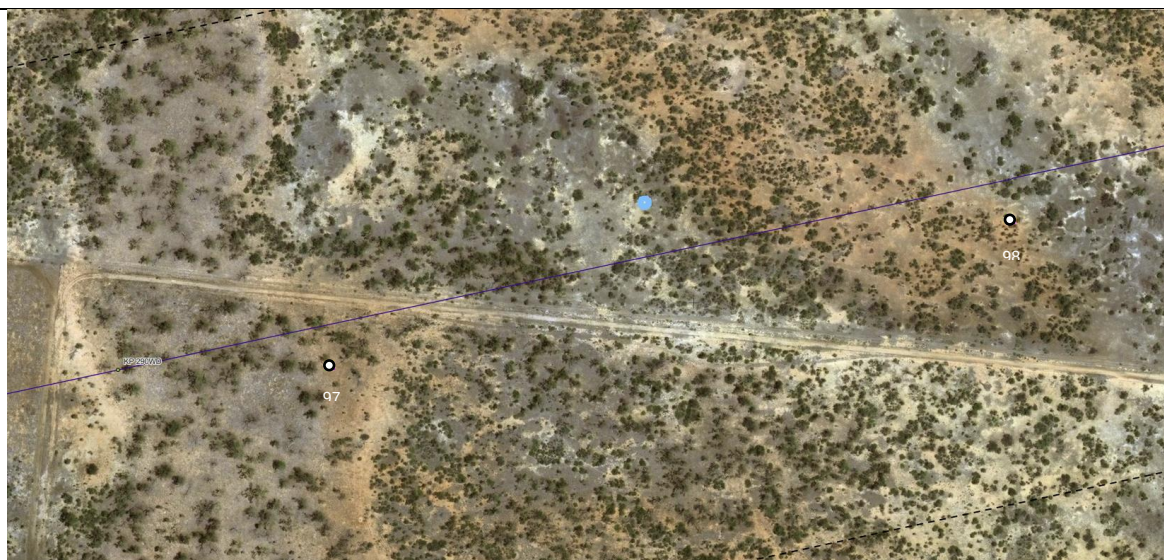

This section is described as 50% very light, 10% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 291 WD (30,20,20,30) Riparian zone (red) near Tower 95

(569.94m between towers 94-95) (Low Risk (Green) DAF – WWBW)

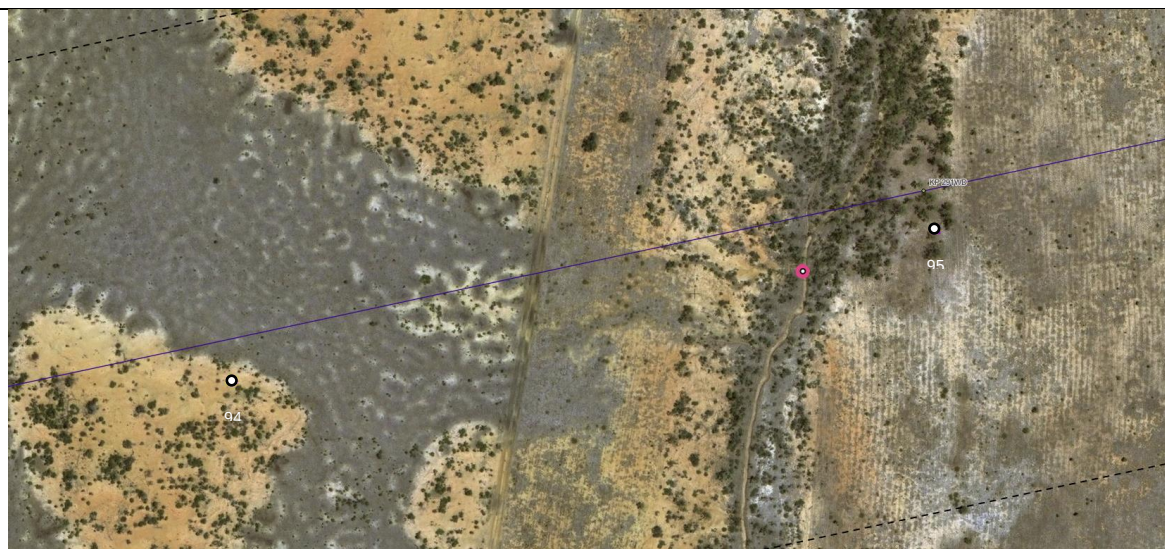


This section is described as 30% very light, 20% light, 20% moderate and 30% heavy by the clearing contractor. Field observations shows a riparian woodland along an 4m wide watercourse. Tree heights ranged up to 15m. The sparse canopy covers the riparian canopy that fringes the watercourse and most of the east section with tree heights averaging around 11m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 292.2 WD (60,30,10,0) Quaternary point (green) near Tower 93
(576.14m between towers 92-93)



This section is described as 60% very light, 30% light, 10% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of the section towards the west tower with tree heights averaging at 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 295 WD (40,0,60,0) Quaternary point (green) near Tower 88
(576.14m between towers 87-88)

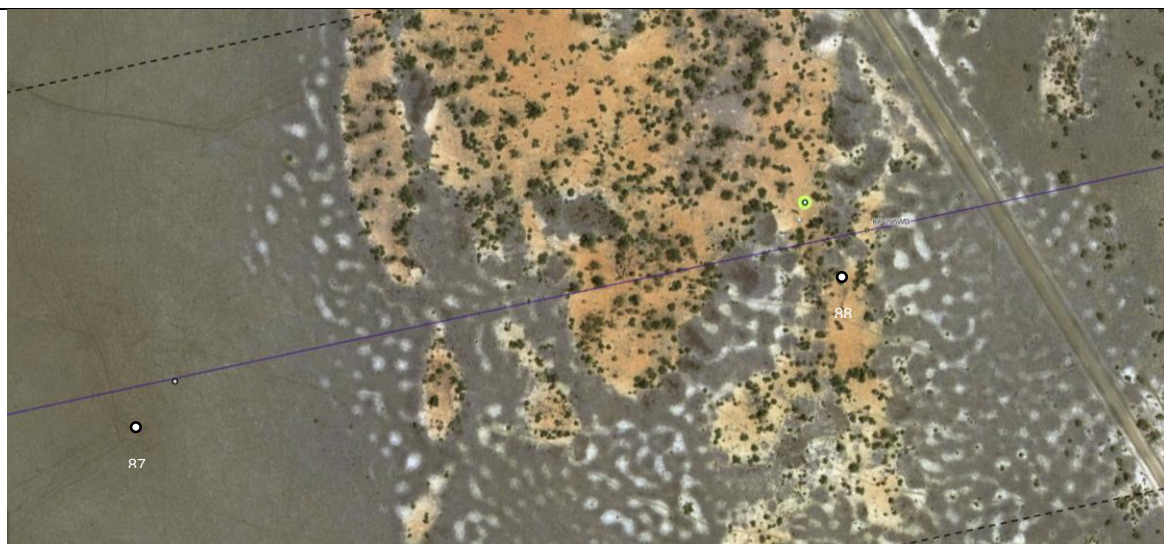


This section is described as 40% very light, 0% light, 60% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of the section towards the east tower with tree heights averaging at 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 299.8 WD (30,0,60,10) Koala survey point (BAAM) (blue) near Tower 80
(605.60m between towers 79-80)



This section is described as 30% very light, 0% light, 60% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse on the survey point. The mid-dense canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 10m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 300.3 WD (30,0,70,0) Koala survey point (GHD) (blue) near Tower 79
(518.39m between towers 78-79)

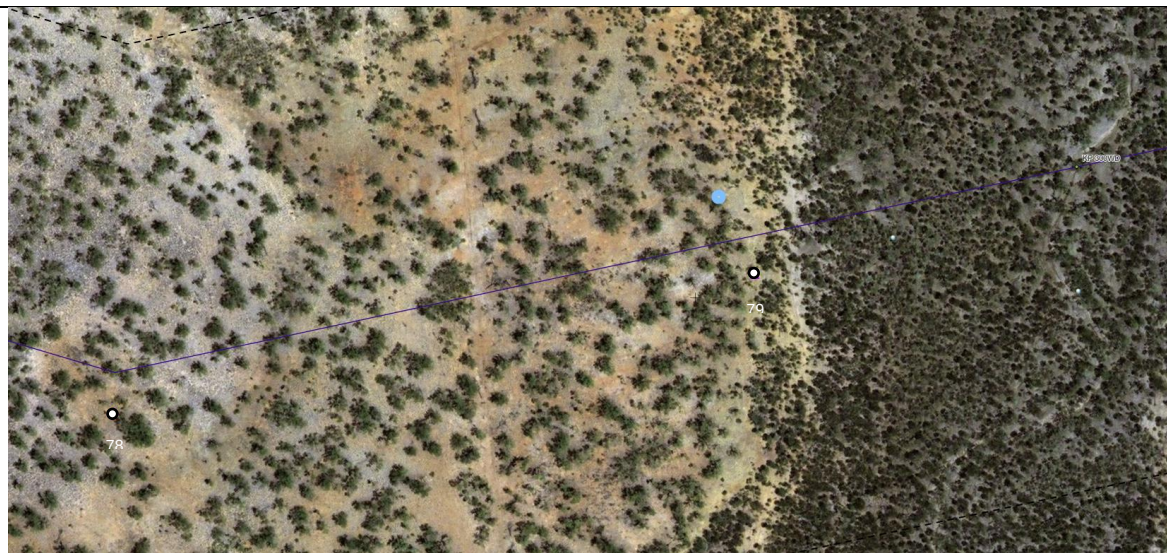


This section is described as 30% very light, 0% light, 70% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of this section with tree heights averaging at 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 302.1 WD (50,0,50,0) Koala survey point (BAAM) (blue) near Tower 75
(511.33m between towers 74A-75)



This section is described as 50% very light, 0% light, 50% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide braided watercourse west of the survey point. The mid-dense canopy covers the riparian canopies that fringe the watercourses and most of this east section with tree heights averaging at 10m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 307.9 WD (30,0,50,20) Koala survey point (BAAM) (blue) near Tower 66
(574.08m between towers 65-66)

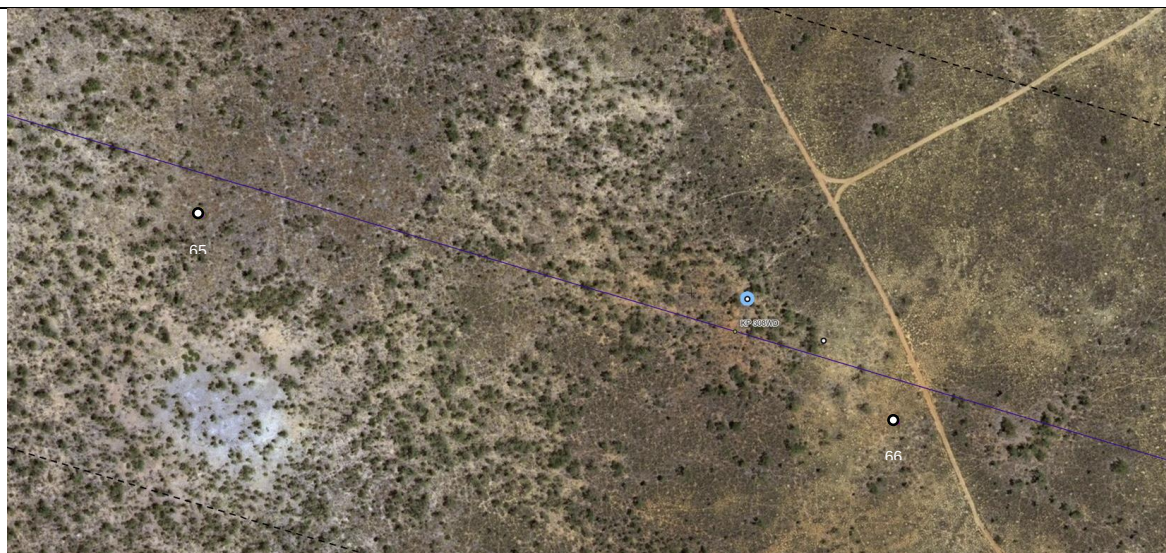


This section is described as 30% very light, 0% light, 50% moderate and 20% heavy by the clearing contractor. Field observations show a sparse to mid-dense canopy covers most of the middle section with tree heights averaging at 10m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 314.9 WD (80,20,0,0) Koala survey point (BAAM) (blue) near Tower 53
(556.10m between towers 52-53)



This section is described as 80% very light, 20% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of the section in small patches with tree heights averaging at 12m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 325.7 WD (70,20,10,0) Quaternary point (green) near Tower 32
(550.85m between towers 31-32)

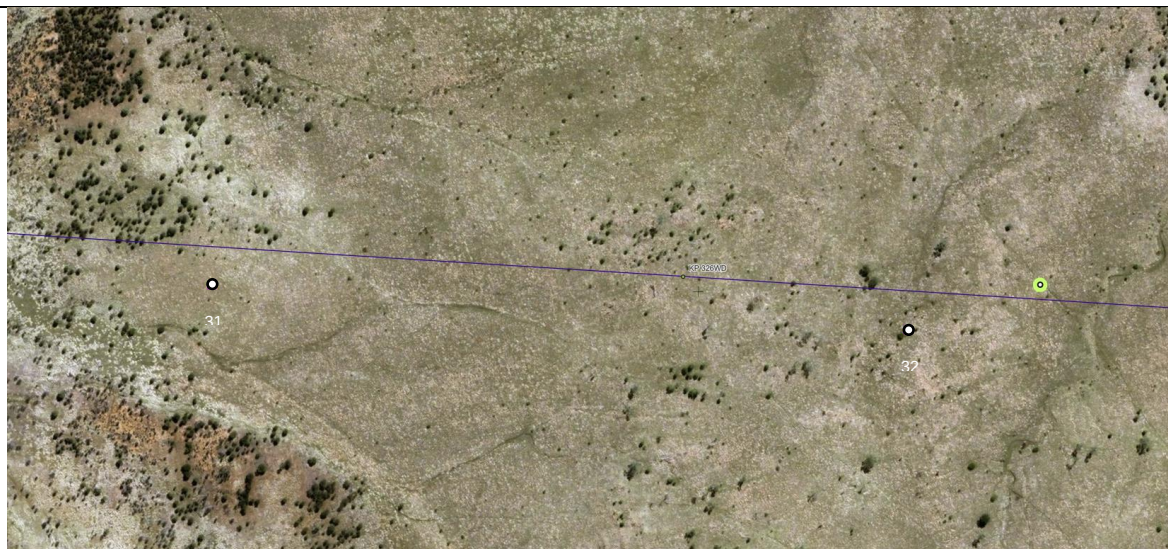

This section is described as 70% very light, 20% light, 10% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of the section towards the east tower with tree heights averaging at 4m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 329.3 WD (90,10,0,0) Quaternary point (green) near Tower 26
(562.93m between towers 25-26)




This section is described as 90% very light, 10% light, 0% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is very sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 330.9 WD (95,5,0,0) Riparian zone (red) near Tower 23
 (631.00m between towers 22-23) (Low Risk (Green) DAF – WWBW)



This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations shows a riparian woodland along an 7m wide watercourse. Tree heights ranged up to 6m. The very sparse canopy covers the riparian canopy that fringes the watercourse and most of the east section with tree heights averaging around 1m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 333.8 WD (95,5,0,0) Quaternary point (green) near Tower 18
(601.84m between towers 17-18)

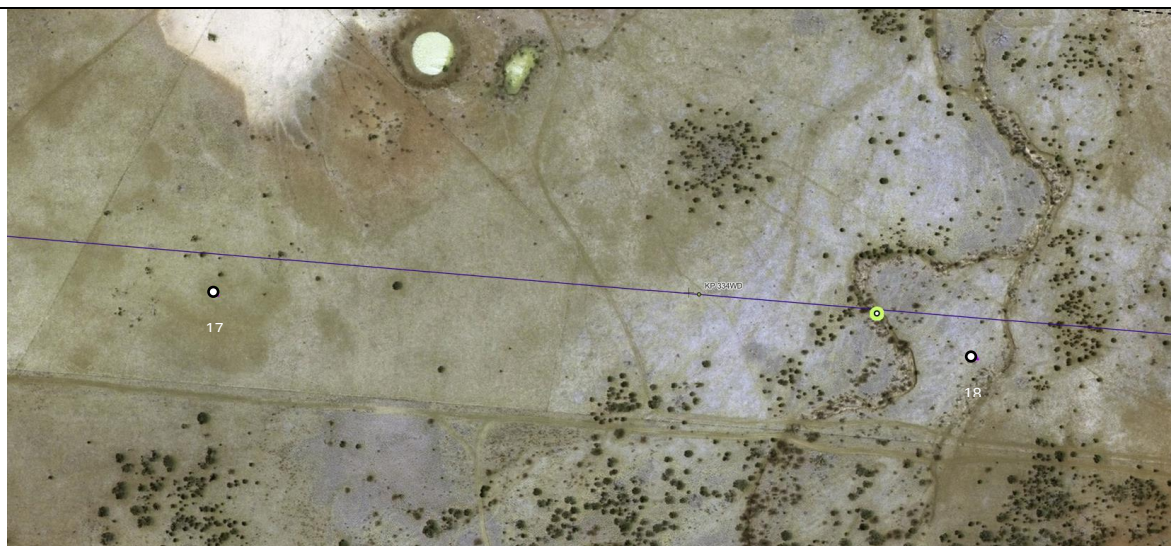


This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations in this section shows a riparian woodland along an 6m wide watercourse. Tree heights ranged up to 5m. The very sparse canopy covers the riparian canopy that fringes the watercourse and most of the east section with tree heights averaging around 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 337.3 WD (80,10,10,0) Riparian zone (red) near Tower 12
 (366.49m between towers 11-12) (Low Risk (Green) DAF – WWBW)



This section is described as 80% very light, 10% light, 10% moderate and 0% heavy by the clearing contractor. Field observations shows a riparian woodland along an 7m wide watercourse. Tree heights ranged up to 6m. The very sparse canopy covers the riparian canopy that fringes the watercourse and most of the east section with tree heights averaging around 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 1 KP 340.8 WD (95,5,0,0) Access track (yellow) near Tower 5
(580.81m between towers 4-5)

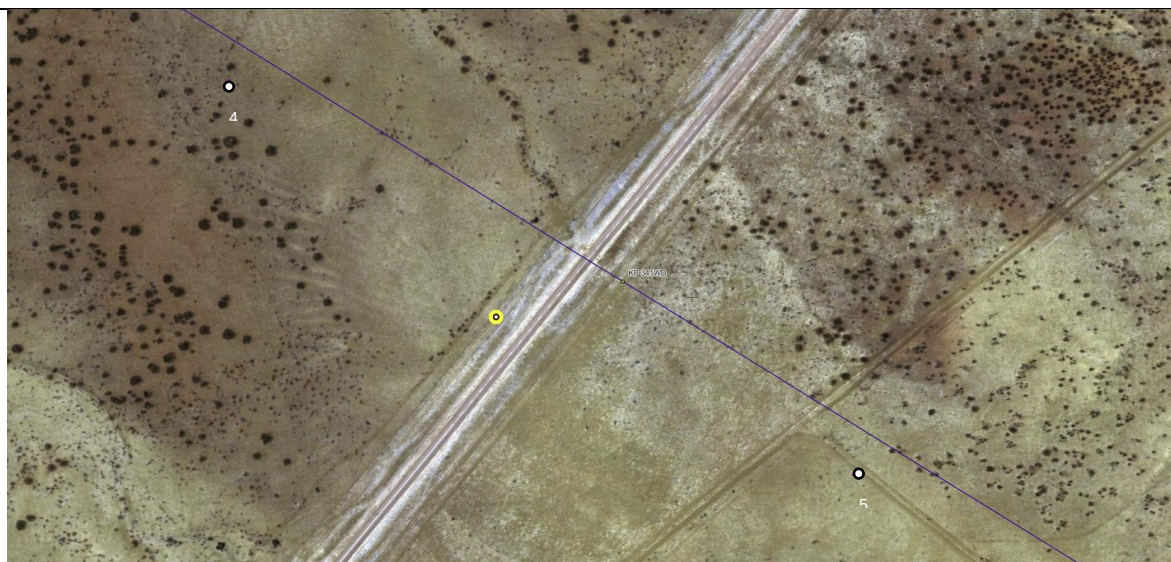

This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is very sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2: CopperString Core


Flinders to Dajarra

Line 2 KP 455.8 WD (95,0,5,0) Quaternary point (green) near Tower 501
(566.234m between towers 500-501)




This section is described as 95% very light, 0% light, 5% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is very sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 461.4 WD (95,5,0,0) Access track (yellow) near Tower 491
(540.000m between towers 490-491)

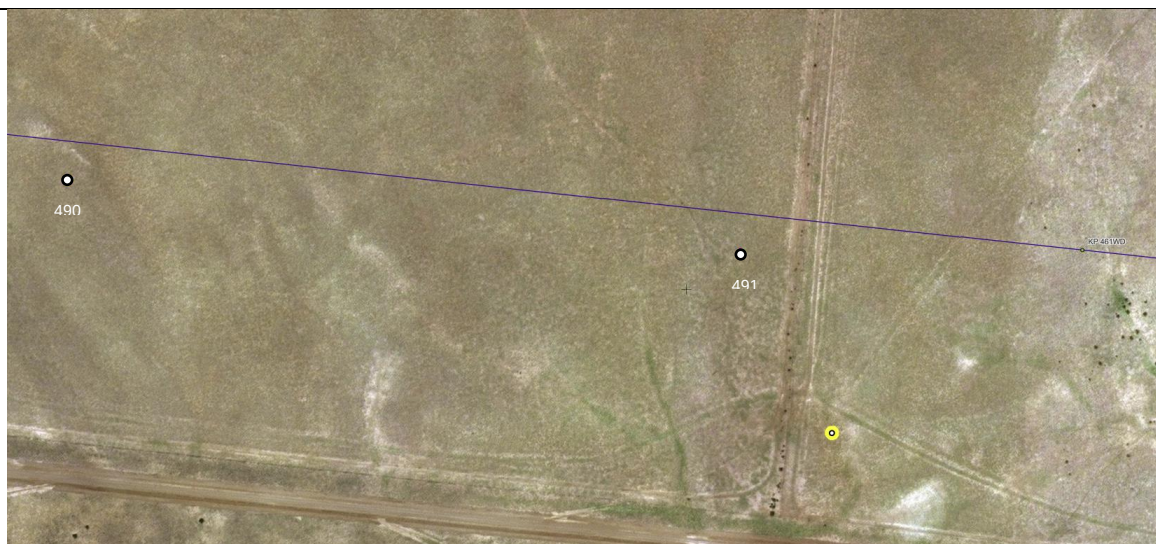


This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is very sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 469.6 WD (95,5,0,0) Quaternary point (green) near Tower 476
(589.030m between towers 475-476)

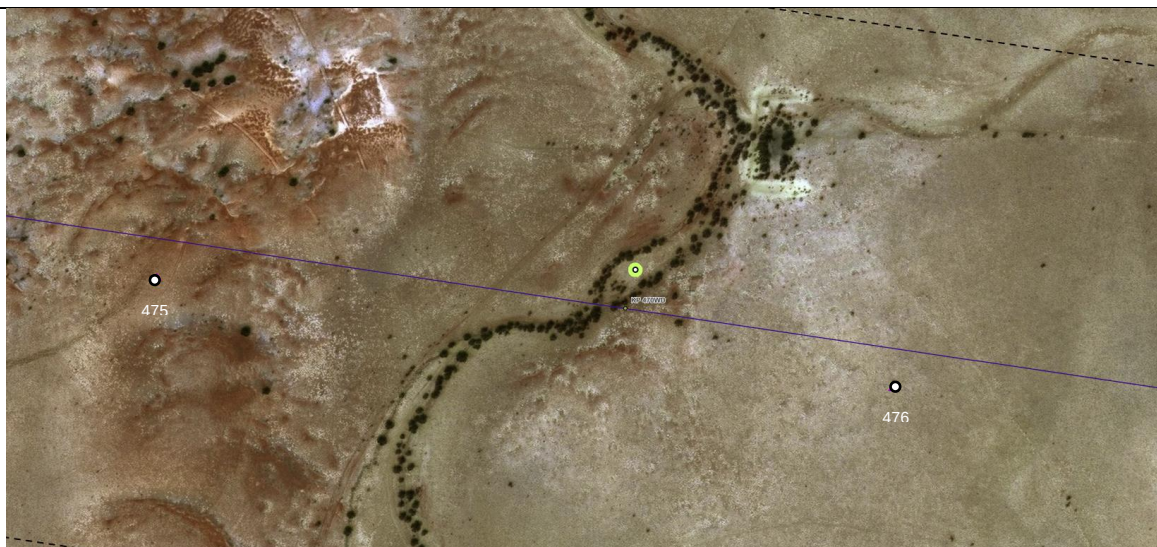


This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 30m wide watercourse on the quaternary point. The very sparse canopy covers the riparian canopy that fringes the watercourse in this section with tree heights averaging at 3.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 470.5 WD (95,5,0,0) Quaternary point (green) near Tower 475
(575.505m between towers 474-475)

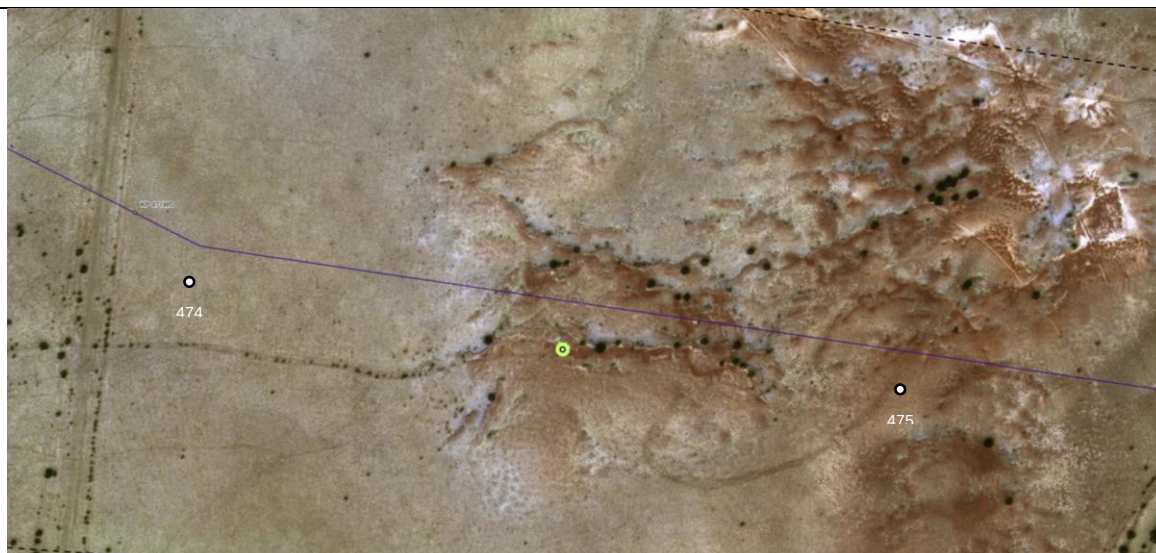

This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse on the quaternary point. The very sparse canopy covers the riparian canopy that fringes the watercourse in this section with tree heights averaging at 4m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.


Line 2 KP 484.5 WD (95,5,0,0) Access track (yellow) near Tower 449
(574.350m between towers 448-449)

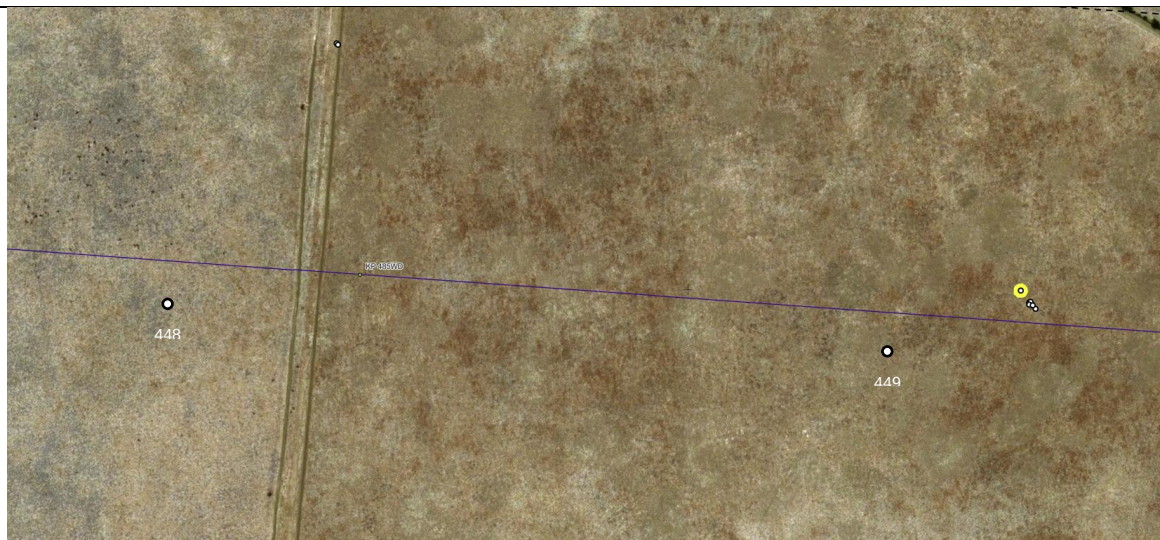

This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is very sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.


Line 2 KP 488 WD (60,10,30,0) Riparian zone (red) near Tower 443

(557.380m between towers 442-443) (Major Risk (Purple) DAF – WWBW)

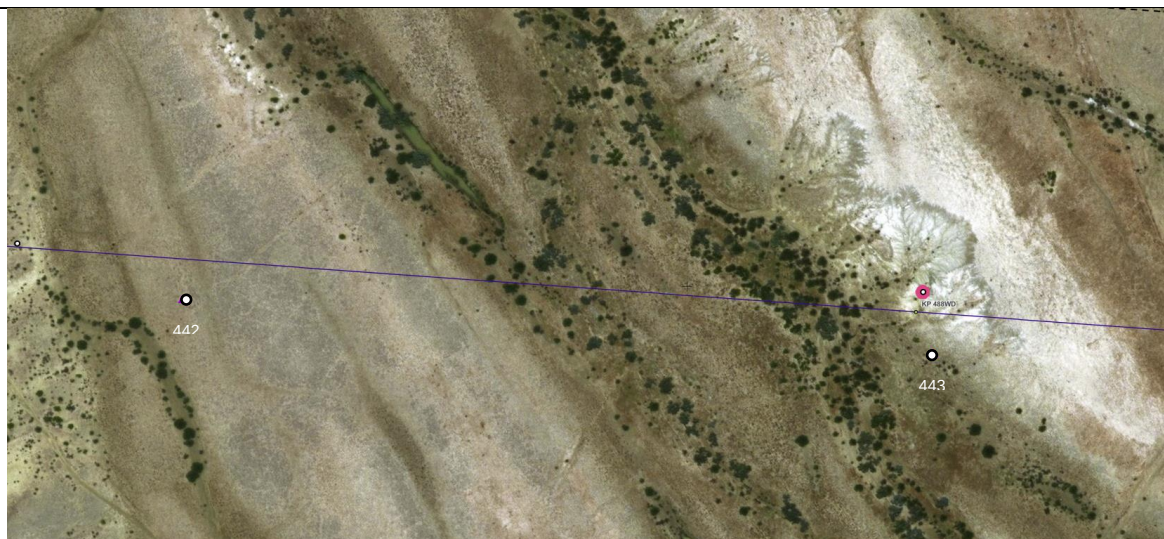


This section is described as 60% very light, 10% light, 30% moderate and 0% heavy by the clearing contractor. Field observations shows riparian woodlands along a braided 15m wide watercourse. Tree heights ranged up to 6m. The sparse canopy covers the riparian canopies that fringe the watercourses in this section with tree heights averaging around 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 492.7 WD (80,20,0,0) Quaternary point (green) near Tower 435
(568.867m between towers 434-435)

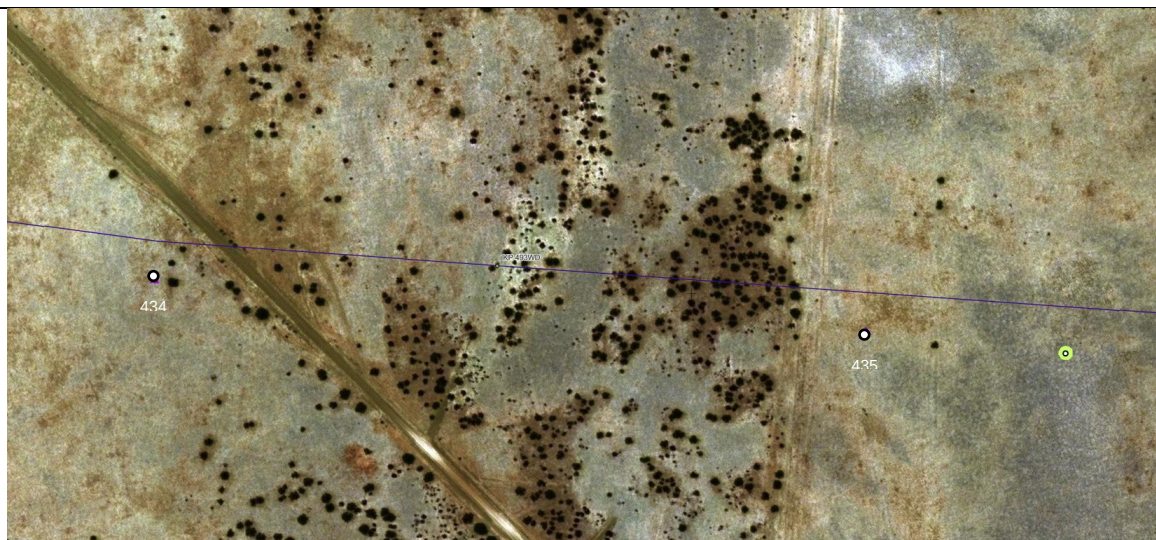


This section is described as 80% very light, 20% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show a very sparse canopy covers most of the east section near the eastern tower with tree heights averaging at 1.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 498.9 WD (95,5,0,0) Quaternary point (green) near Tower 424
(567.569m between towers 423-424)

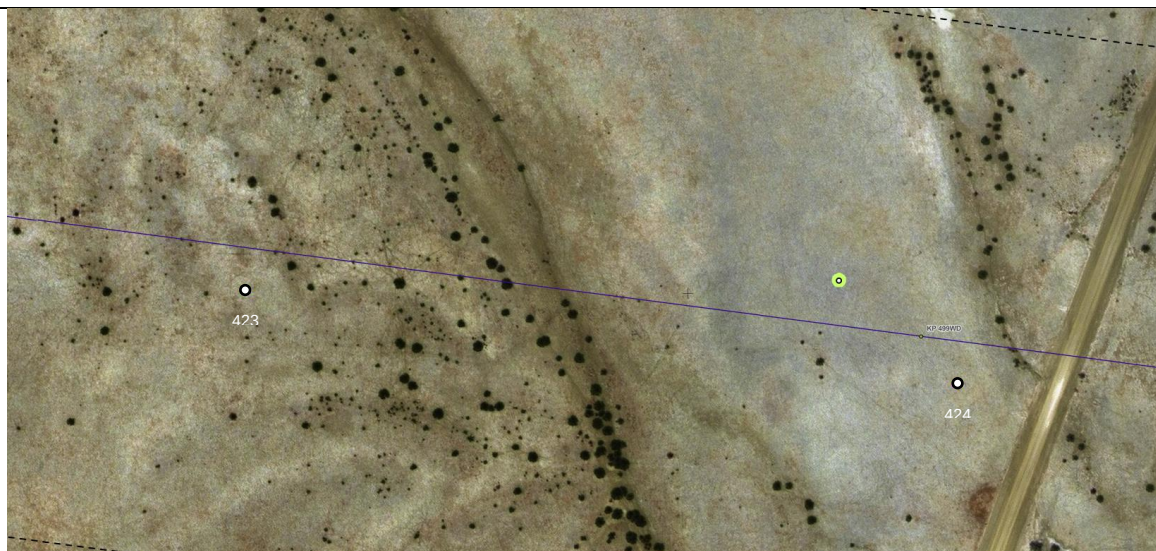

This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show a very sparse canopy covers a riparian woodland along a gully line west of the quaternary point with tree heights averaging at 2.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 510.4 WD (90,0,10,0) Access track (yellow) near Tower 404
(585.000m between towers 403-404)

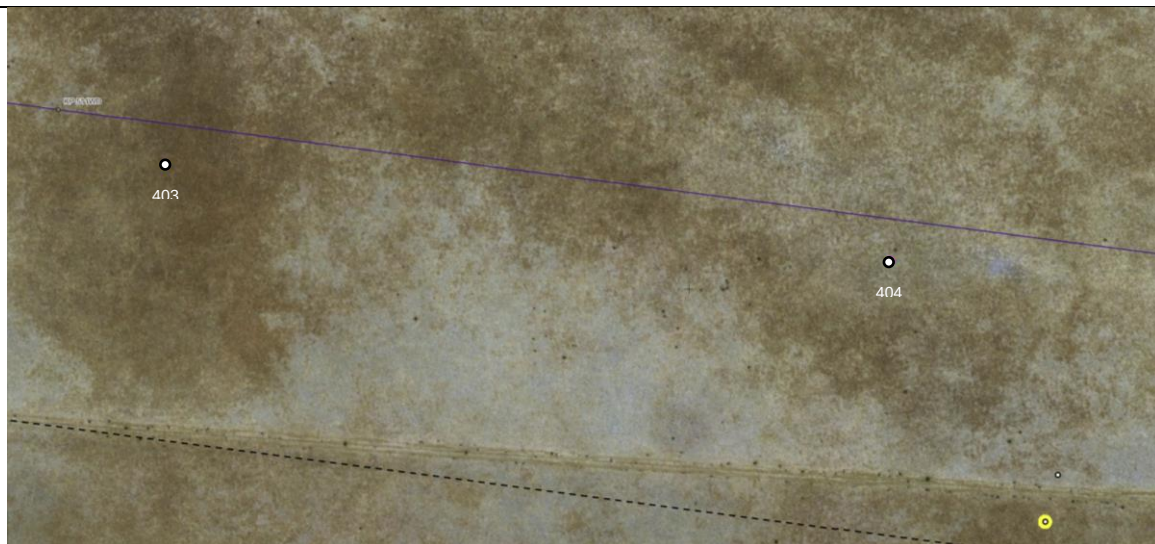

This section is described as 90% very light, 0% light, 10% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.


Line 2 KP 522.7 WD (90,10,0,0) Quaternary point (green) near Tower 383
(580.533m between towers 382-383)



This section is described as 90% very light, 10% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 20m wide watercourse west of the quaternary point. The very dense canopy covers the riparian canopy that fringes the watercourse in this section. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 526.1 WD (60,20,10,10) Riparian zone (red) near Tower 377

(563.967m between towers 376-377) (Major Risk (Purple) DAF – WWBW)

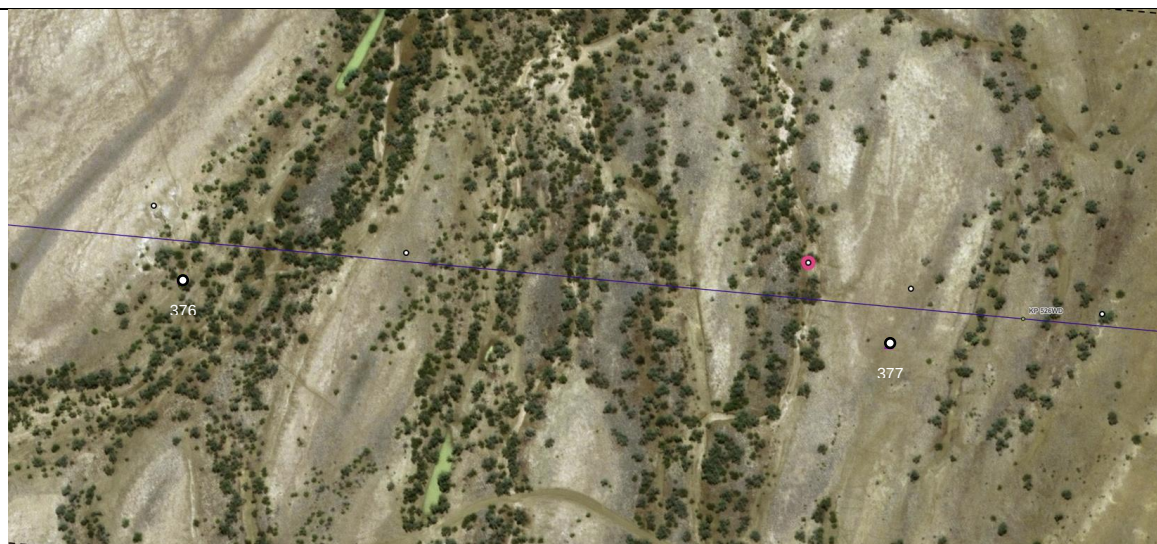


This section is described as 60% very light, 20% light, 10% moderate and 10% heavy by the clearing contractor. Field observations shows riparian woodlands along a braided 15m wide watercourse. Tree heights ranged up to 6.6m. The sparse canopy covers the riparian canopies that fringe the watercourses in this section with tree heights averaging around 6.6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 528.3 WD (70,0,10,20) Quaternary point (green) near Tower 373
(596.952m between towers 372-373)




This section is described as 70% very light, 0% light, 10% moderate and 20% heavy by the clearing contractor. Field observations show a riparian woodland along a 20m wide watercourse west of the quaternary point. The sparse canopy covers the riparian canopy that fringes the watercourse in this section with tree heights averaging at 1.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 531.8 WD (90,0,10,0) Quaternary point (green) near Tower 367
(596.588m between towers 366-367)

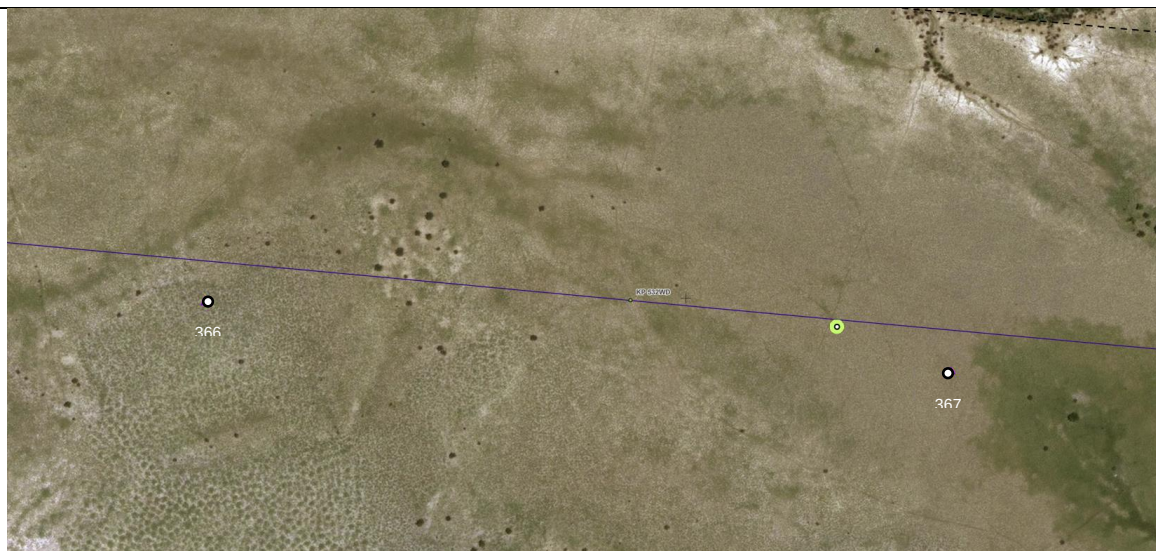


This section is described as 90% very light, 0% light, 10% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 536.5 WD (95,5,0,0) Quaternary point (green) near Tower 359
(593.232m between towers 358-359)

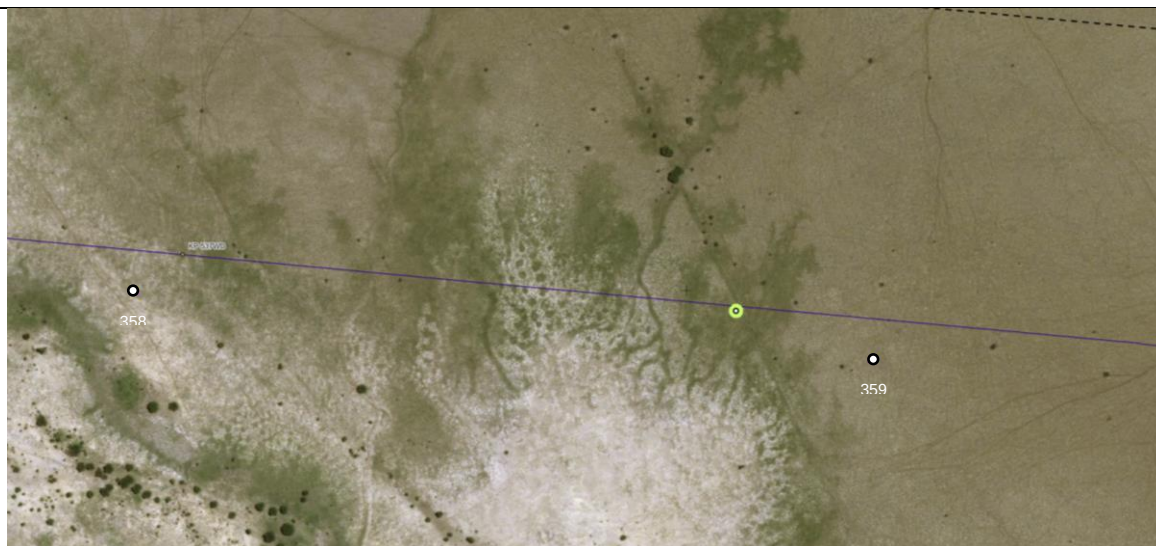

This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is very sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 541.7 WD (80,0,20,0) Quaternary point (green) near Tower 350
 (588.368m between towers 349-350)

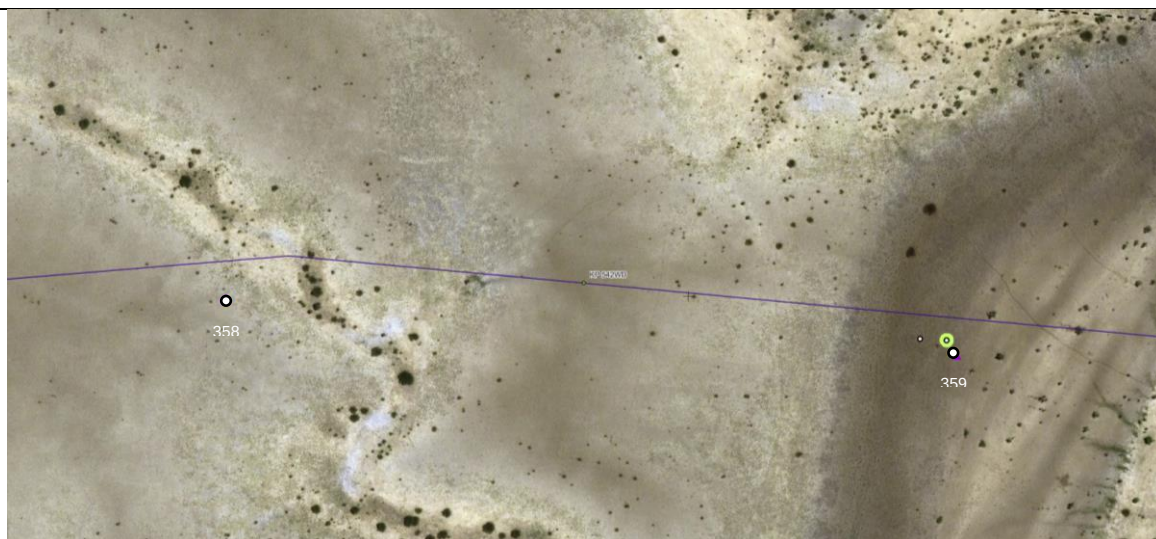

This section is described as 80% very light, 0% light, 20% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 30m wide watercourse west of the quaternary point. The sparse canopy covers the riparian canopy that fringes the watercourse in this section with tree heights averaging at 4.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 544.3 WD (75,5,20,0) Riparian zone (red) near Tower 345
(609.816m between towers 344-345) (Major Risk (Purple) DAF – WWBW)



This section is described as 75% very light, 5% light, 20% moderate and 0% heavy by the clearing contractor. Field observations shows riparian woodlands along a braided 25m wide watercourse. Tree heights ranged up to 7m. The very sparse canopy covers the riparian canopies that fringe the watercourses in this section with tree heights averaging around 3.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 548.7 WD (95,5,0,0) Quaternary point (green) near Tower 337
(589.305m between towers 336-337)




This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 15m wide watercourse west of the quaternary point. The very sparse canopy covers the riparian canopy that fringes the watercourse and extending gully line in this section with tree heights averaging at 2m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 554.3 WD (60,0,40,0) Quaternary point (green) near Tower 327
(539.489m between towers 326-327)




This section is described as 60% very light, 0% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse west of the quaternary point. The mid-dense canopy covers the riparian canopy that fringes the watercourse and scattered patches throughout whole section with tree heights averaging at 2.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 561 WD (40,0,60,0) Access track (yellow) near Tower 315
(556.801m between towers 314-315)

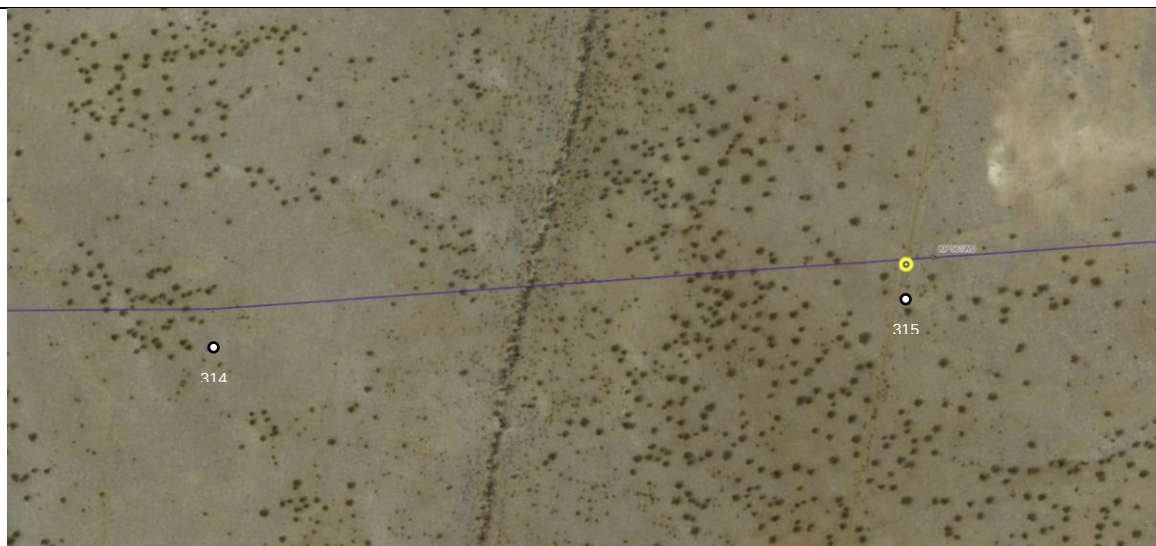

This section is described as 60% very light, 0% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse west of the access track. The mid-dense canopy covers the riparian canopy that fringes the watercourse and most of the section near the eastern tower with tree heights averaging at 2.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.


Line 2 KP 565.1 WD (90,0,10,0) Quaternary point (green) near Tower 308
(593.432m between towers 307-308)

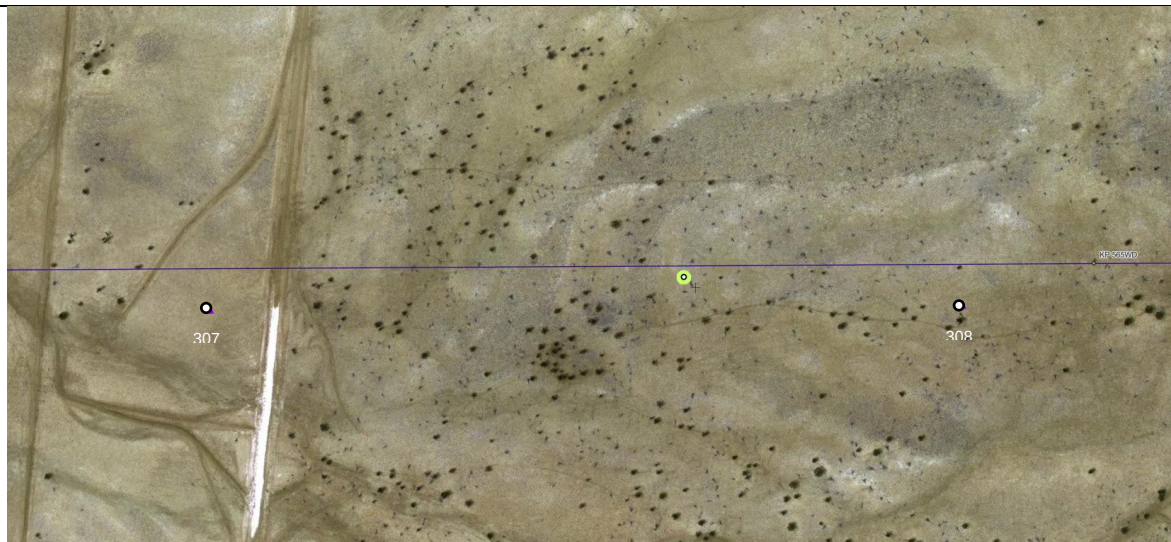

This section is described as 90% very light, 0% light, 10% moderate and 0% heavy by the clearing contractor. Field observations show mid-dense canopy covers scattered patches throughout whole section with tree heights averaging at 2m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.


Line 2 KP 586 WD (80,20,0,0) Riparian zone (red) near Tower 272

(582.364m between towers 271-272) (Low Risk (Green) DAF – WWBW)

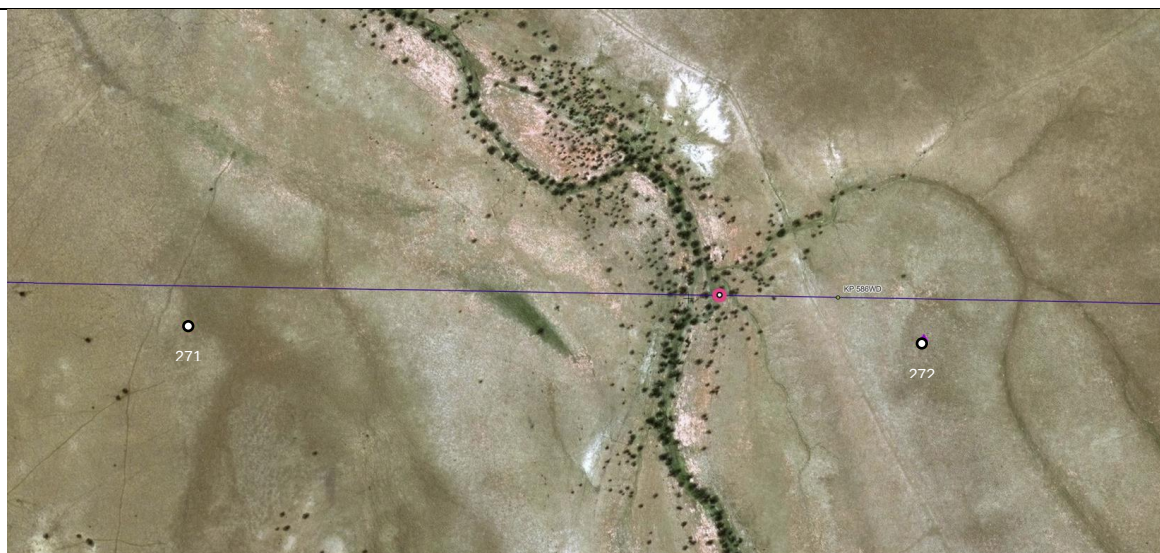

This section is described as 80% very light, 20% light, 0% moderate and 0% heavy by the clearing contractor. Field observations shows a riparian woodland along a 10m wide watercourse. Tree heights ranged up to 2m. The sparse canopy covers the riparian canopy that fringes the watercourse in this section with tree heights averaging around 1.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 591.8 WD (95,0,5,0) Access track (yellow) near Tower 262
(560.681m between towers 261-262)

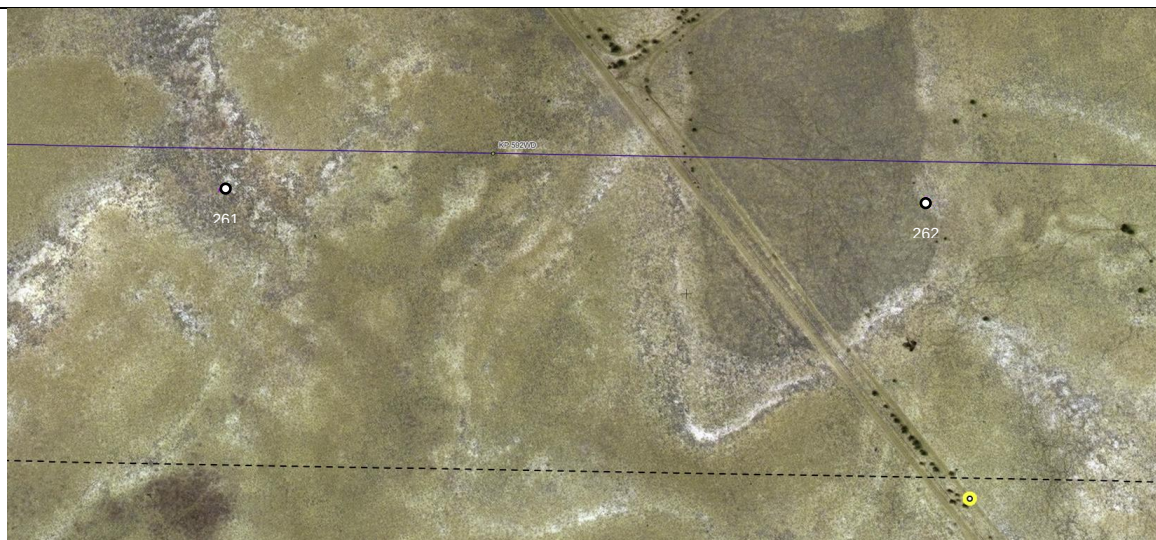


This section is described as 95% very light, 0% light, 5% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers most of the section near the eastern tower with tree heights averaging at 2m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 689.7 WD (50,20,30,0) Quaternary point (green) near Tower 91
(563.000m between towers 90-91)



This section is described as 50% very light, 20% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers the whole section although mostly near the access track in this section with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 692.5 WD (30,70,0,0) Quaternary point (green) near Tower 86
(542.496m between towers 85-86)

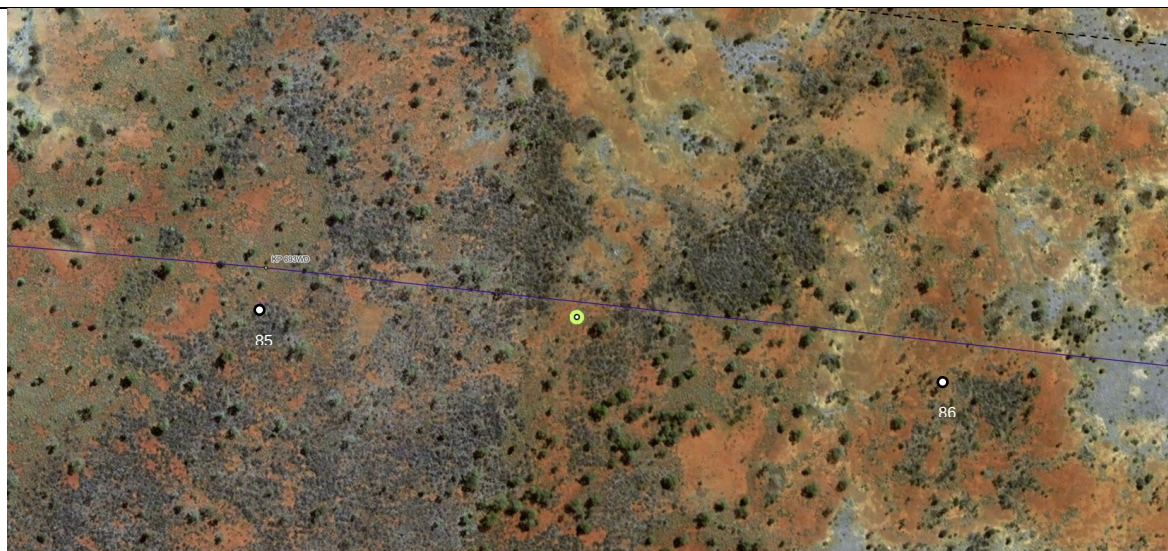

This section is described as 30% very light, 70% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show mid-dense canopy covers most of the mid-section although scattered throughout whole section with tree heights averaging at 8.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 696.5 WD (20,0,80,0) Riparian zone (red) near Tower 79
 (598.455m between towers 78-79) (Low Risk (Green) DAF – WWBW)



This section is described as 20% very light, 0% light, 80% moderate and 0% heavy by the clearing contractor. Field observations shows riparian woodland along a 90m wide watercourse. Tree heights ranged up to 15m. The dense canopy covers the riparian canopy that fringes the watercourse and gully lines east of riparian zone in this section with tree heights averaging around 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 2 KP 700.1 DM (40,0,60,0) Quaternary point (green) near Tower 73
(572.389m between towers 72-73)



This section is described as 40% very light, 60% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show mid-dense canopy covers most of the east section near the eastern tower although scattered throughout whole section with tree heights averaging at 7.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3: Mt Isa Augmentation


Dajarra to Mt Isa

Line 3 KP 14.8 DM (40,20,20,20) Quaternary point (green) near Tower 167
(410.734m between towers 166-167)




This section is described as 40% very light, 20% light, 20% moderate and 20% heavy by the clearing contractor. Field observations show a riparian woodland along a 30m wide watercourse to the east of the quaternary point. The sparse canopy covers the riparian canopy that fringes the watercourse and most of this section with tree heights averaging at 4m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 15.8 DM (50,0,50,0) Access track (yellow) near Tower 165
(625.650m between towers 164-165)

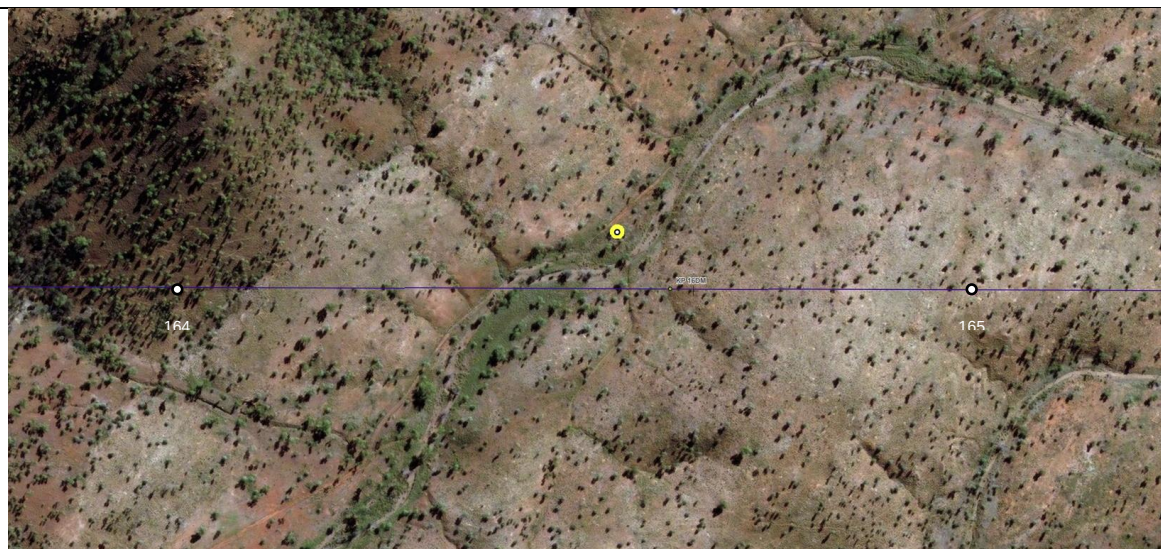

This section is described as 50% very light, 0% light, 50% moderate and 0% heavy by the clearing contractor. Field observations show that this access track was slightly overgrown with termite mounds beside. Observations also indicate that there is a riparian woodland along a 30m wide watercourse to the east of the track. The mid-dense canopy covers the riparian canopy that fringes the watercourse and hillslopes throughout this section with tree height averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 16.9 DM (50,0,50,0) Quaternary point (green) near Tower 163
(354.090m between towers 162A-163)

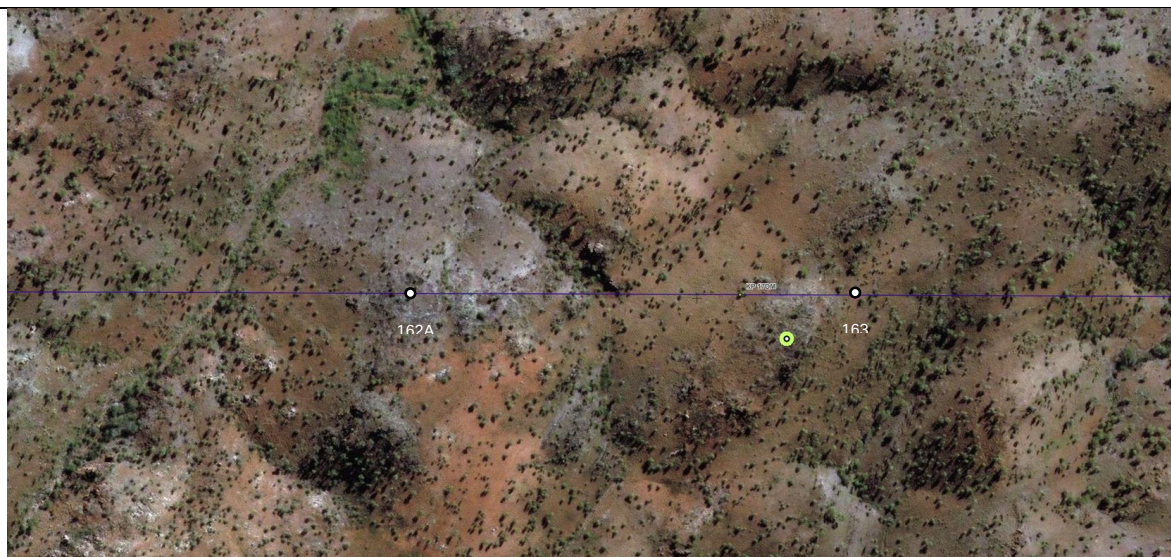

This section is described as 50% very light, 0% light, 50% moderate and 0% heavy by the clearing contractor. Field observations show that the mid-dense canopy covers most of this section, although congregated on the hillslopes and gully lines with tree heights averaging up to 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 19.1 DM (40,0,60,0) Quaternary point (green) near Tower 159
(580.941m between towers 158-159)



This section is described as 40% very light, 0% light, 60% moderate and 0% heavy by the clearing contractor. Field observations show that the mid-dense canopy covers most of this section, although congregated on the hillslopes and gully lines with tree heights averaging up to 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 23.1 DM (40,0,60,0) Quaternary point (green) near Tower 151
(569.238m between towers 150-151)



This section is described as 40% very light, 0% light, 60% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 30m wide watercourse to the west of the quaternary point. The mid-dense canopy covers the riparian canopy that fringes the watercourse and the western side of this section with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 24.9 DM (60,0,40,0) Quaternary point (green) near Tower 148
(542.995m between towers 147-148)



This section is described as 60% very light, 0% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a forked watercourse of 10m and 30m wide to the east of the quaternary point. The mid-dense canopy covers the riparian canopies that fringe the watercourses and the western side of this section with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.


Line 3 KP 25.5 DM (50,0,20,30) Riparian zone (red) near Tower 147

(522.052m between towers 146-147) (Low Risk (Green) DAF – WWBW)




This section is described as 50% very light, 0% light, 20% moderate and 30% heavy by the clearing contractor. Field observations show a riparian woodland along a 60m wide watercourse. Tree heights ranged up to 16m. The sparse canopy covers the riparian canopy fringing the watercourse and most of the western side of this section with tree heights averaging around 8m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 42.7 DM (70,0,30,0) Riparian zone (red) near Tower 113
 (604.867m between towers 112-113) (Low Risk (Green) DAF – WWBW)

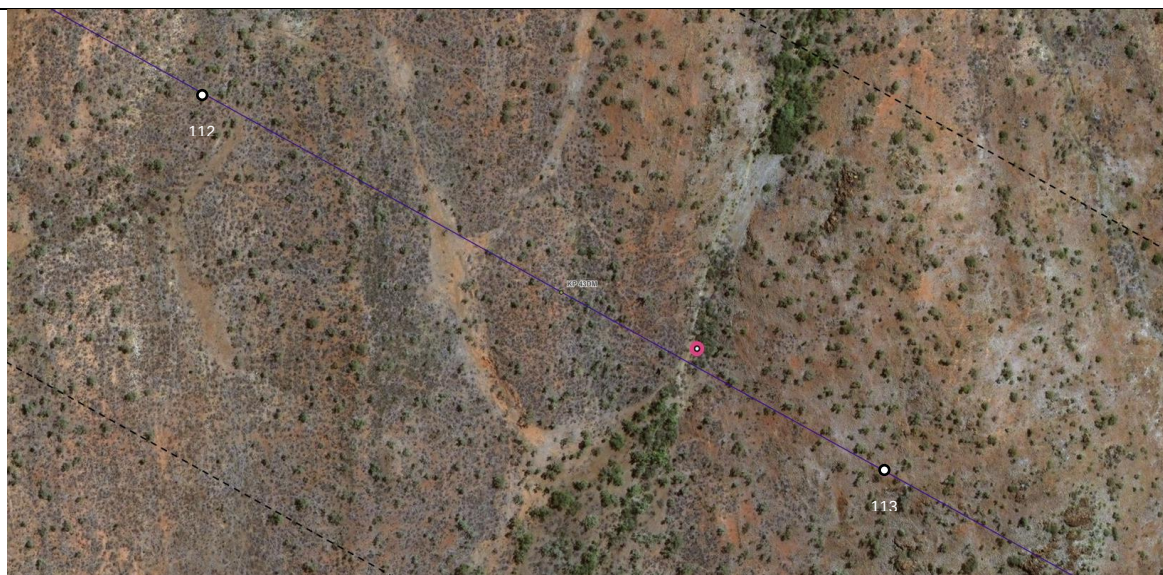

This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 50m wide watercourse. Tree heights ranged up to 8m. The sparse canopy covers the riparian canopy fringing the watercourse and most of the eastern side of this section with tree heights averaging around 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 44.5 DM (60,0,30,10) Quaternary point (green) near Tower 110
(520.379m between towers 109-110)

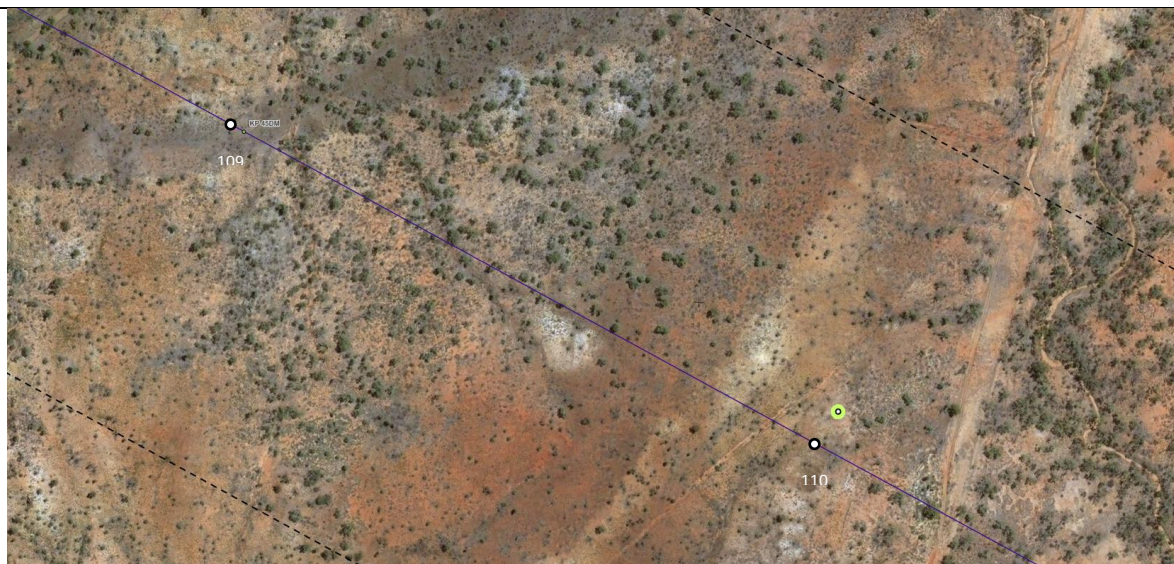

This section is described as 60% very light, 0% light, 30% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along a forked watercourse of 10m and 20m wide to the west of the quaternary point. The sparse canopy covers the riparian canopies that fringe the watercourses and the between them with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.


Line 3 KP 46.5 DM (50,0,40,10) Quaternary point (green) near Tower 106
(585.637m between towers 105-106)



This section is described as 50% very light, 0% light, 40% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along a 30m wide watercourse with gully line to the west of the quaternary point. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and gully line in this section with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 52.8 DM (30,0,30,40) Riparian zone (red) near Tower 96

(611.233m between towers 95A-96) (Moderate Risk (Amber) DAF – WWBW)

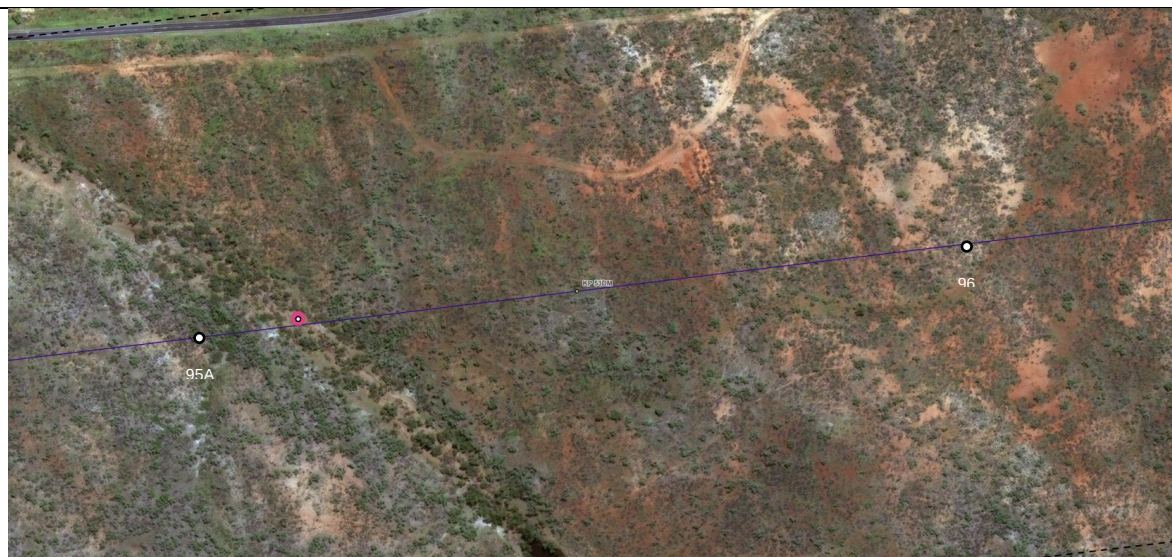

This section is described as 30% very light, 0% light, 30% moderate and 40% heavy by the clearing contractor. Field observations show a riparian woodland along a 45m wide watercourse. Tree heights ranged up to 16m. The sparse to mid-dense canopy covers the riparian canopy fringing the watercourse and mostly the western side of this section, although throughout whole section with tree heights averaging around 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 54.4 DM (40,30,30,0) Access track (yellow) near Tower 93A
(418.380m between towers 93-93A)



This section is described as 40% very light, 30% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show that this access track was slightly overgrown with a powerline above. The sparse canopy covers the edges of section towards the towers with clearing in mid-section with tree height averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 57.1 DM (60,0,40,0) Quaternary point (green) near Tower 89
(616.370m between towers 88-89)



This section is described as 60% very light, 0% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse to the west of the quaternary point. The mid-dense canopy covers the riparian canopy that fringes the watercourse and surroundings in the middle of this section with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 61.8 DM (60,0,40,0) Quaternary point (green) near Tower 80
(528.847m between towers 79-80)



This section is described as 60% very light, 0% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers the riparian canopy that fringes the gully line and along ridge lines with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 65.1 DM (60,0,40,0) Quaternary point (green) near Tower 73
(586.458m between towers 72B-73)




This section is described as 60% very light, 0% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along an 85m wide watercourse. Tree heights ranged up to 18m. The mid-dense canopy covers the riparian canopy fringing the watercourse and small gully lines throughout this section with tree heights averaging around 13m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 69.9 DM (70,0,30,0) Quaternary point (green) near Tower 64
(593.488m between towers 63-64)




This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers a few small gully lines scattered throughout this section with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 79.9 DM (70,0,30,0) Quaternary point (green) near Tower 44
(541.265m between towers 43-44)

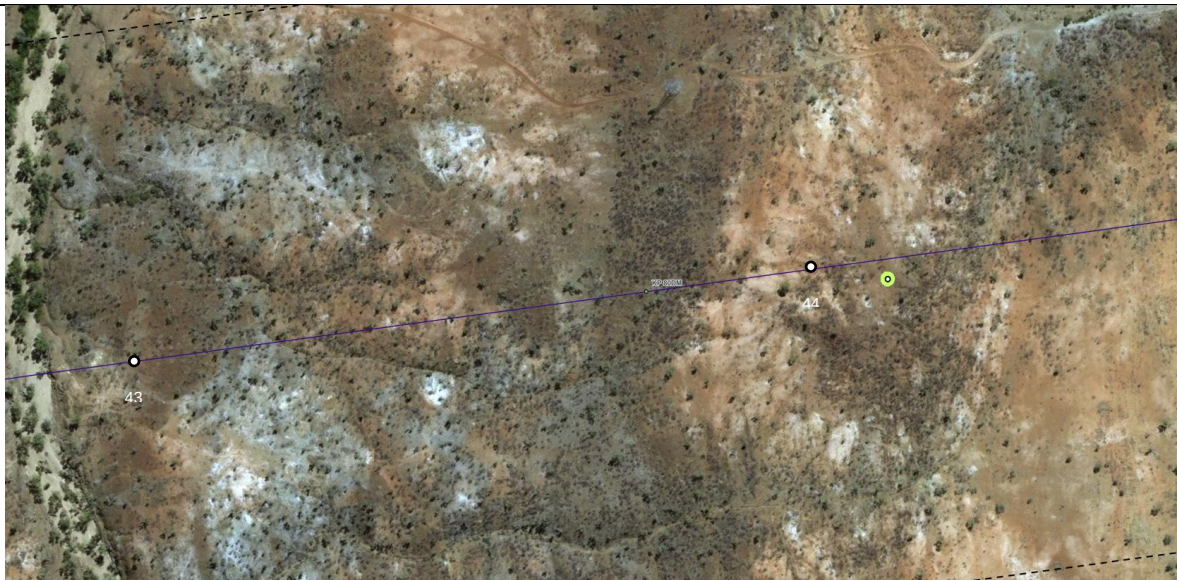

This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers a few small gully lines scattered throughout this section with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 86 DM (50,0,50,0) Quaternary point (green) near Tower 33
(363.449m between towers 32-33)

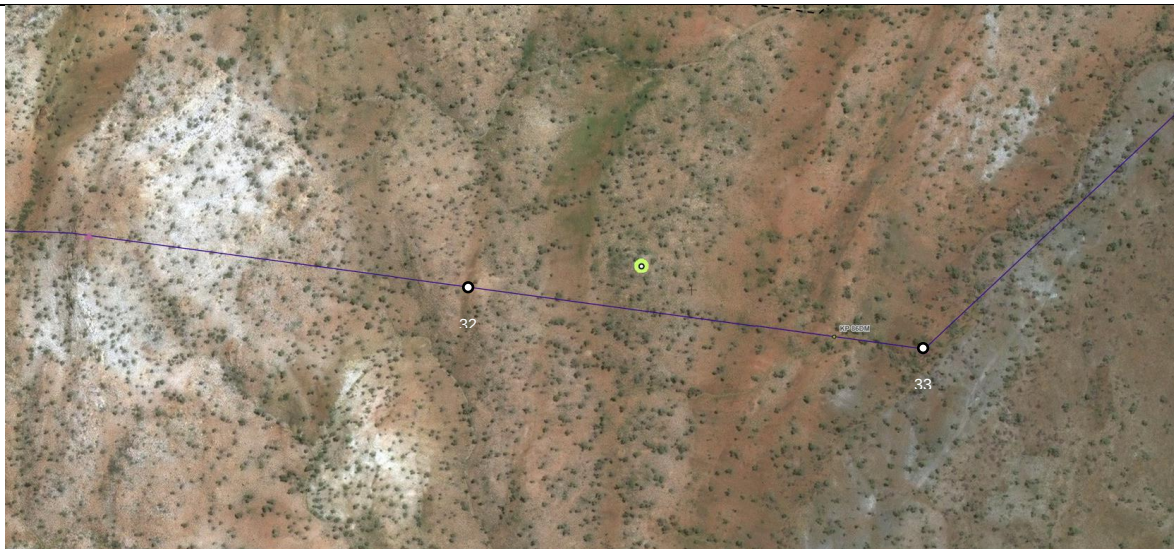

This section is described as 50% very light, 0% light, 50% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers along hillslopes scattered throughout this section with tree heights averaging at 5.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 88 DM (30,0,30,40) Quaternary point (green) near Tower 28
(714.422m between towers 27-28)



This section is described as 30% very light, 0% light, 30% moderate and 40% heavy by the clearing contractor. Field observations show a riparian woodland along a 20m wide watercourse to the east of the quaternary point. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and surroundings on hillslopes throughout this section with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 3 KP 93.3 DM (40,40,20,0) Riparian zone (red) near Tower 18
 (538.702m between towers 17-18) (Low Risk (Green) DAF – WWBW)




This section is described as 40% very light, 40% light, 20% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 30m wide watercourse. Tree heights ranged up to 12m. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and most of the eastern side of this section with tree heights averaging around 8m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4: Southern Connection


Dajarra to Selwyn

Line 4 KP 4.2 DS (70,0,30,0) Quaternary point (green) near Tower 13
(622.383m between towers 12-13)

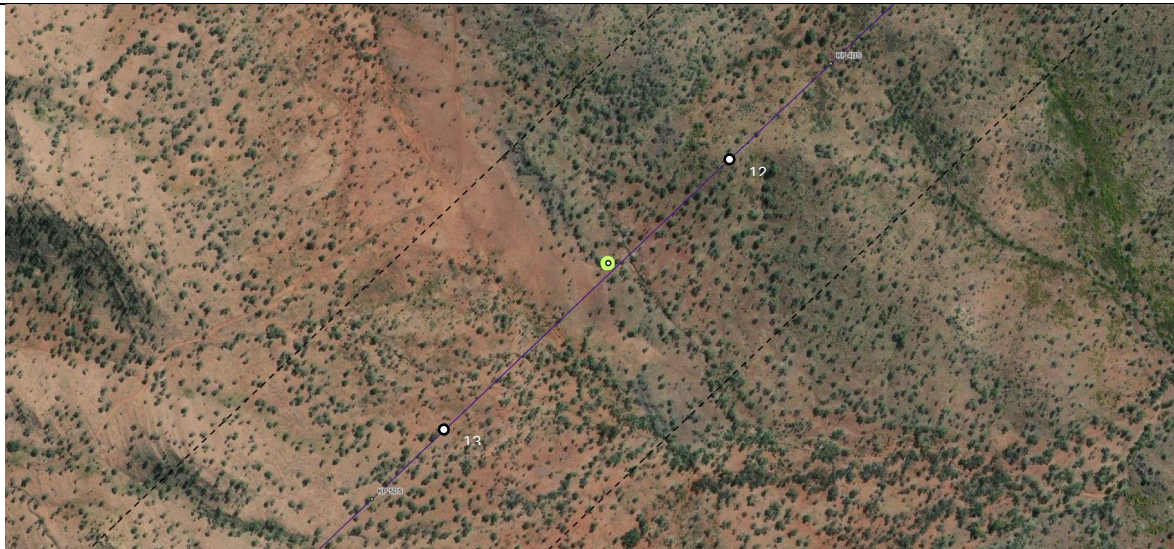

This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers a few small gully lines scattered throughout this section with tree heights averaging at 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 15 DS (50,0,50,0) Access track (yellow) near Tower 33
(486.052m between towers 32-33)

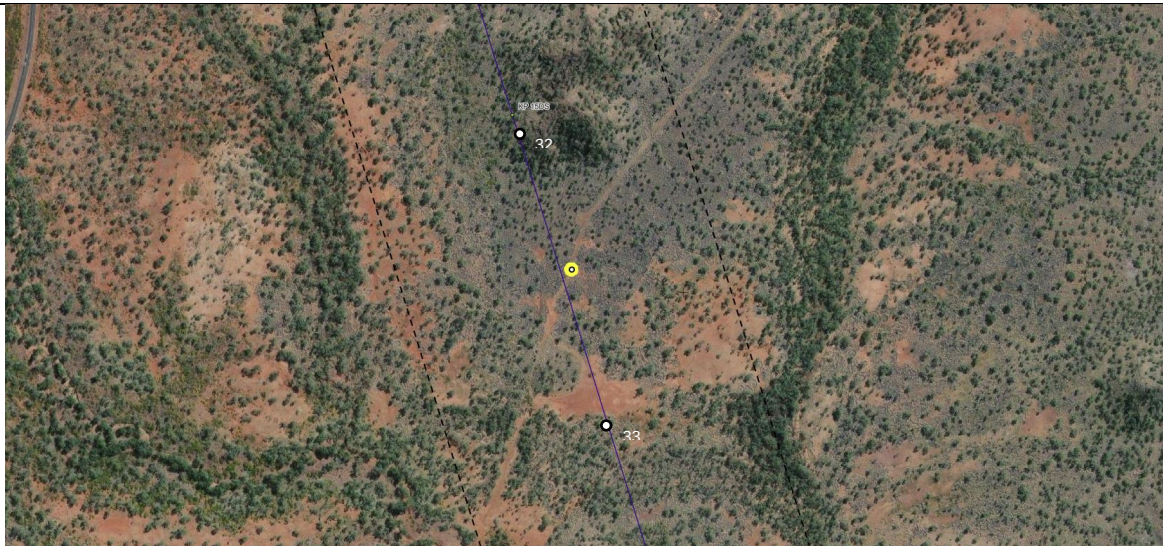


This section is described as 50% very light, 0% light, 50% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers a hillslope toward the north of section and a small patch south of access track with tree heights averaging at 8m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 30.2 DS (60,0,40,0) Quaternary point (green) near Tower 63
(684.947m between towers 62-63)



This section is described as 40% very light, 0% light, 40% moderate and 20% heavy by the clearing contractor. Field observations show a riparian woodland along a 16m wide watercourse on the quaternary point. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and hillslopes to north and south near tower locations of this section with tree heights averaging at 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 39.3 DS (30,40,30,0) Riparian zone (red) near Tower 81
 (617.879m between towers 80-81) (Major Risk (Purple) DAF – WWBW)

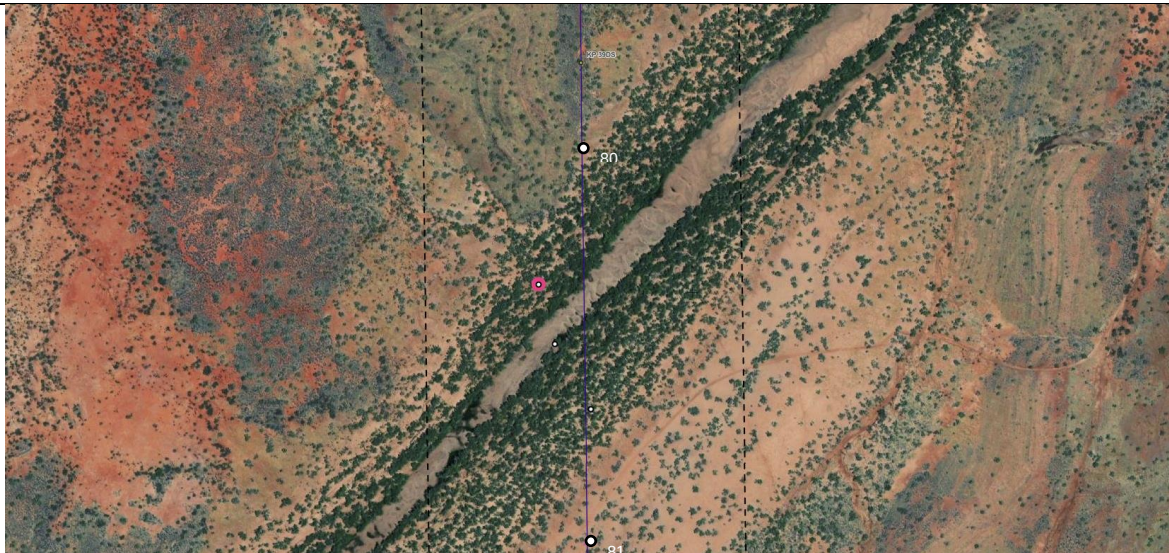

This section is described as 30% very light, 40% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 260m wide watercourse. Tree heights ranged up to 19m. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse with tree heights averaging around 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 44.9 DS (70,0,30,0) Quaternary point (green) near Tower 91
(618.255m between towers 90-91)



This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 15m wide watercourse south of the quaternary point. The sparse canopy covers the riparian canopy that fringes the watercourse and a section south of watercourse with tree heights averaging at 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 49 DS (70,0,30,0) Riparian zone (red) near Tower 99
 (583.545m between towers 98-99) (High Risk (Red) DAF – WWBW)




This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 70m wide watercourse. Tree heights ranged up to 16m. The sparse canopy covers the riparian canopy that fringes the watercourse with tree heights averaging around 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 55.8 DS (60,0,40,0) Access track (yellow) near Tower 111
(564.355m between towers 110-111)




This section is described as 60% very light, 0% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland running within 150m parallel with the alignment. The mid-dense canopy covers the riparian canopy that fringes the watercourse and a section south of the northern tower with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 63.1 DS (60,0,30,10) Quaternary point (green) near Tower 124
(588.792m between towers 123-124)

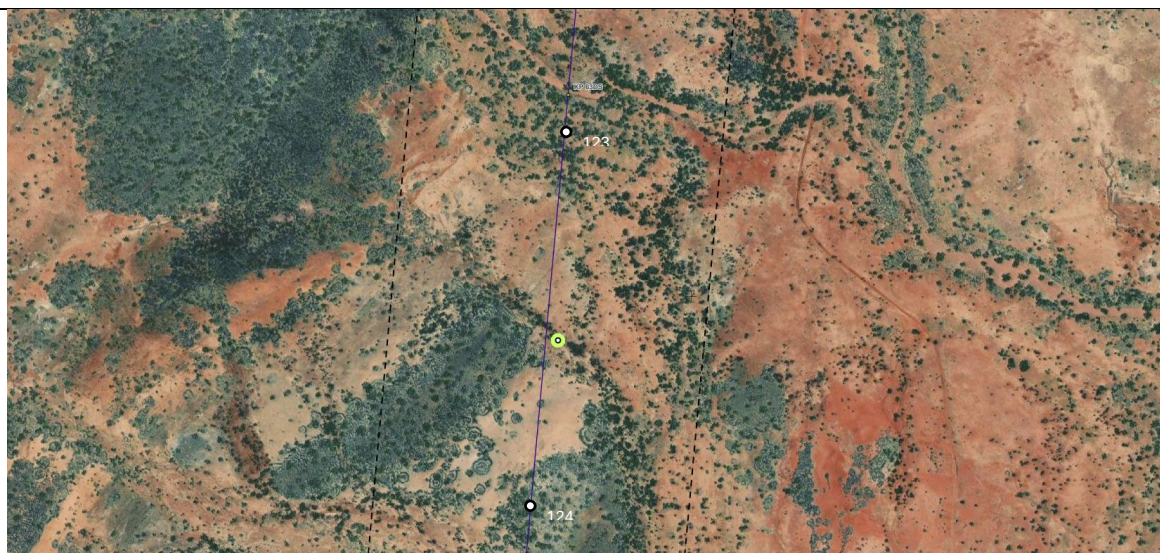

This section is described as 60% very light, 0% light, 30% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along a 25m wide watercourse on the quaternary point. The sparse canopy covers the riparian canopy that fringes the watercourse and a section south of the northern tower with tree heights averaging at 6.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 67 DS (70,20,10,0) Quaternary point (green) near Tower 131
(587.439m between towers 130-131)

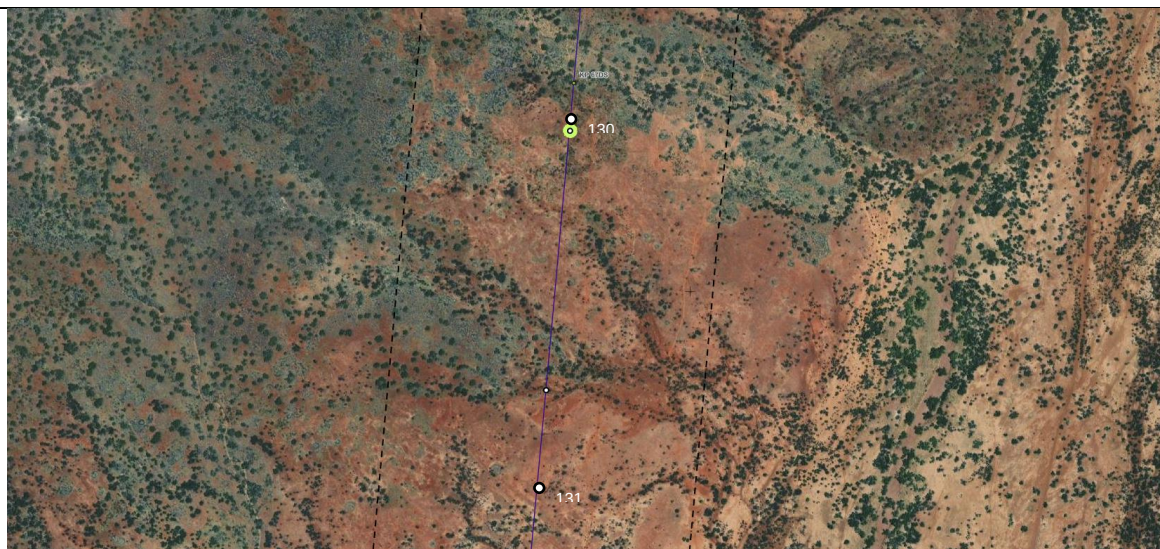

This section is described as 70% very light, 0% light, 20% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along a forked watercourse of 30m and 35m south of the quaternary point. The sparse canopy covers the riparian canopy that fringes the watercourse with tree heights averaging at 4.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 68.4 DS (40,0,40,20) Riparian zone (red) near Tower 133

(586.986m between towers 132-133) (Moderate Risk (Amber) DAF – WWBW)




This section is described as 40% very light, 0% light, 40% moderate and 20% heavy by the clearing contractor. Field observations show a riparian woodland along a 24m wide watercourse. Tree heights ranged up to 12m. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and most of the section especially to the north with tree heights averaging around 12m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 70 DS (70,0,30,0) Access track (yellow) near Tower 136
(551.842m between towers 135-136)



This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers most of the section especially a section near the northern tower with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 71.4 DS (30,0,30,40) Riparian zone (red) near Tower 138
 (481.181m between towers 137-138) (Major Risk (Purple) DAF – WWBW)

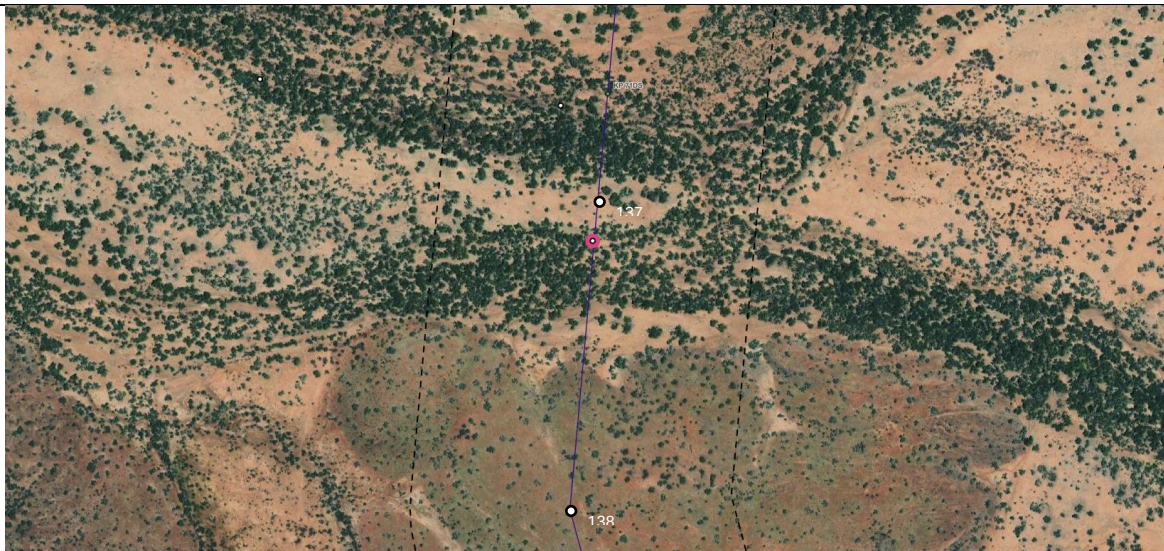

This section is described as 30% very light, 0% light, 30% moderate and 40% heavy by the clearing contractor. Field observations show a riparian woodland along a 148m wide watercourse. Tree heights ranged up to 19m. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and throughout most of this section with tree heights averaging around 8m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 77.6 DS (20,0,60,20) Quaternary point (green) near Tower 151
(401.235m between towers 150-151)



This section is described as 20% very light, 0% light, 60% moderate and 20% heavy by the clearing contractor. Field observations show a riparian woodland along a 20m wide watercourse south of the quaternary point. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and hillslopes throughout the whole section with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 88.1 DS (70,0,30,0) Riparian zone (red) near Tower 171

(607.259m between towers 170-171) (Low Risk (Green) DAF – WWBW)



This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 15m wide watercourse. Tree heights ranged up to 12m. The sparse canopy covers the riparian canopy that fringes the watercourse and gully lines scattered throughout this section with tree heights averaging around 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 4 KP 89.4 DS (60,0,30,10) Quaternary point (green) near Tower 173
(565.612m between towers 172-173)



This section is described as 60% very light, 0% light, 30% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along a 40m wide watercourse south of the quaternary point. The sparse canopy covers the riparian canopy that fringes the watercourse and gully lines extending from watercourse throughout the whole section with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5: Woodya Connection

Selwyn to Woodya

Line 5 KP 0.5 SP (40,0,40,20) Quaternary point (green) near Tower 4
(583.077m between towers 3-4)




This section is described as 40% very light, 0% light, 40% moderate and 20% heavy by the clearing contractor. Field observations show a riparian woodland along a 15m wide forked watercourse to the south of the quaternary point. The sparse to mid-dense canopy covers the riparian canopies that fringe the watercourses and most of the middle section with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 2.1 SP (70,0,20,10) Riparian zone (red) near Tower 6A
 (540.000m between towers 6-6A) (Low Risk (Green) DAF – WWBW)




This section is described as 70% very light, 0% light, 20% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along a 18m wide watercourse. Tree heights ranged up to 10m. The sparse canopy covers the riparian canopy fringing the watercourse and most of the northern side of this section with tree heights averaging around 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 3.8 SP (40,20,40,0) Quaternary point (green) near Tower 9
(570.000m between towers 8-9)

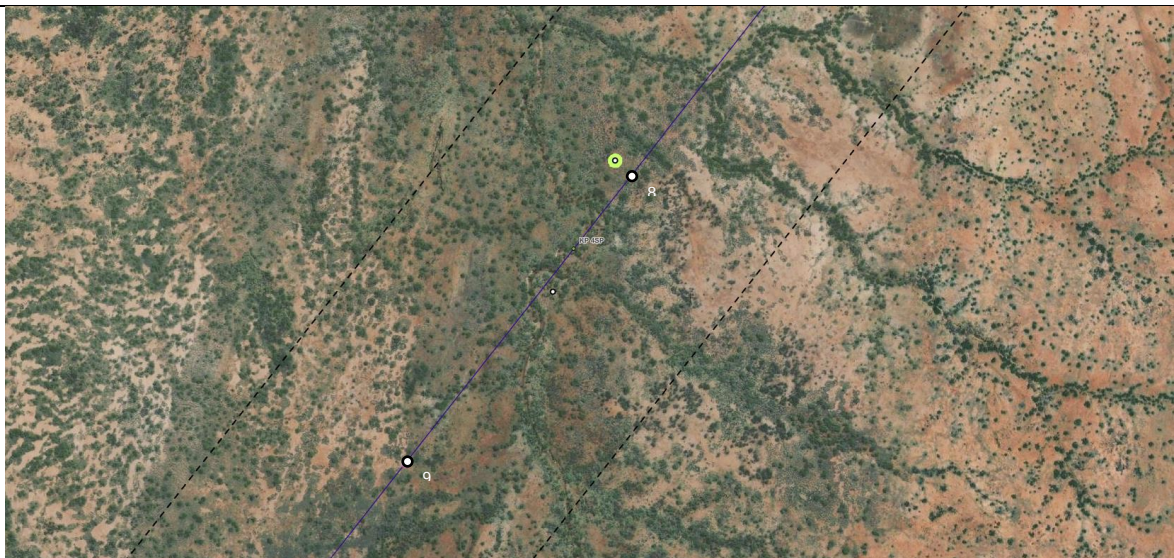

This section is described as 40% very light, 20% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 15m wide watercourse to the south of the quaternary point. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and most of the north section with tree heights averaging at 4m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 6.6 SP (40,20,30,10) Access track (yellow) near Tower 14
(488.812m between towers 13-14)

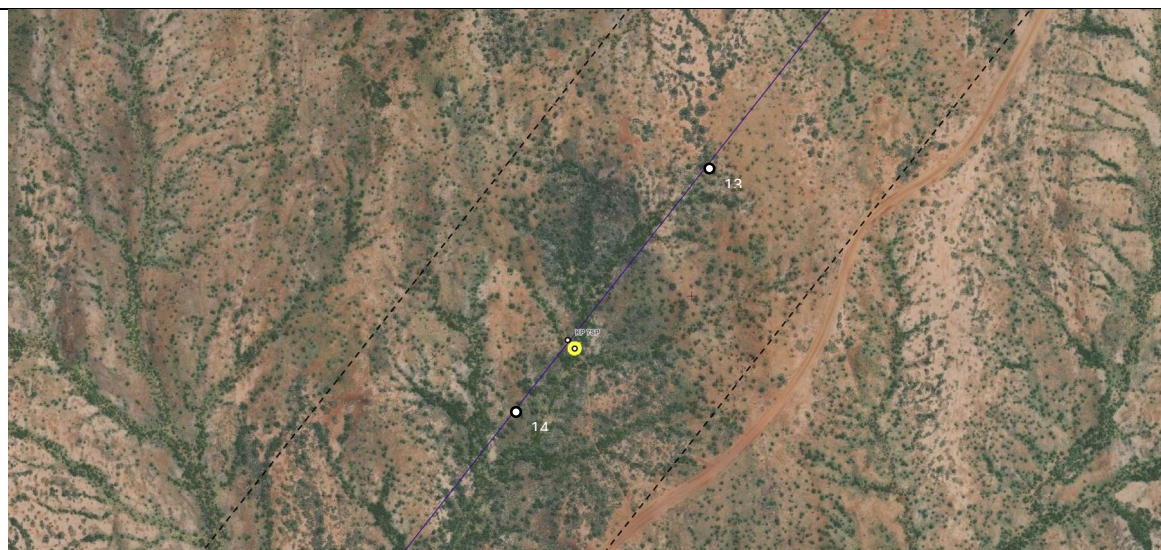


This section is described as 40% very light, 20% light, 30% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse on the access track. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and gully lines, as well as most of the north section with tree heights averaging at 3.5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 7.8 SP (40,20,40,0) Quaternary point (green) near Tower 16
(528.530m between towers 15-16)




This section is described as 40% very light, 20% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse south of the quaternary point. The sparse to mid-dense canopy covers the riparian canopy that fringes the watercourse and gully lines, as well as most of this section with tree heights averaging at 4m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 11.5 SP (70,0,10,20) Access track (yellow) near Tower 23
(536.933m between towers 22-23)

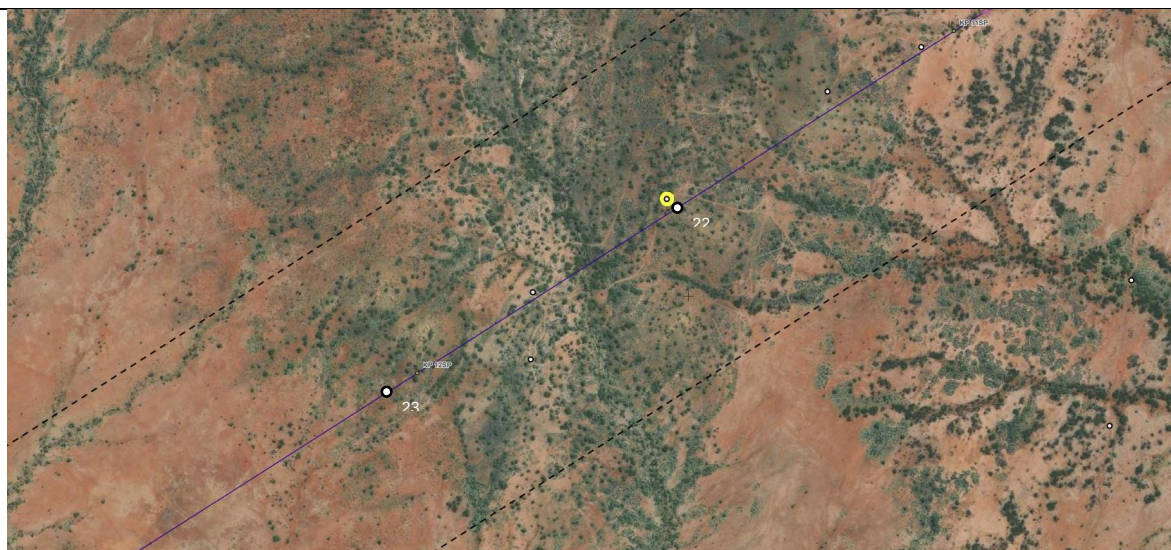

This section is described as 70% very light, 0% light, 10% moderate and 20% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse south of the access track. The sparse canopy covers the riparian canopy that fringes the watercourse and gully lines, as well as most of this section with tree heights averaging at 4m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 13.8 SP (60,0,40,0) Quaternary point (green) near Tower 27
(593.681m between towers 26-27)

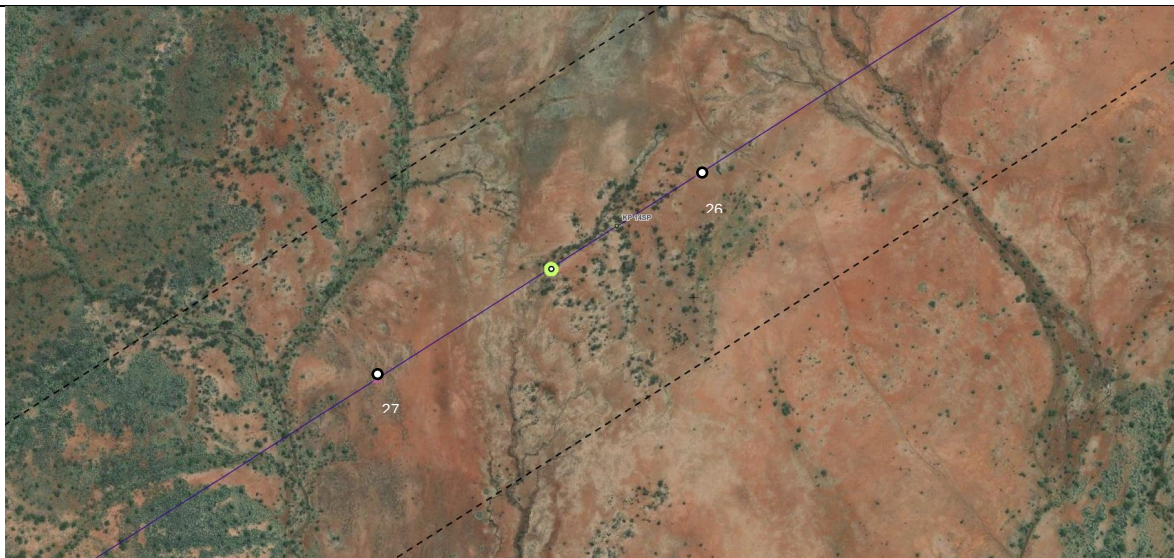


This section is described as 60% very light, 0% light, 40% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers a small patch towards the northern tower of this section with tree heights averaging at 4m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 17.4 SP (70,0,30,0) Riparian zone (red) near Tower 33
 (550.173m between towers 32-33) (Low Risk (Green) DAF – WWBW)



This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 12m wide watercourse. Tree heights ranged up to 9m. The sparse canopy covers the riparian canopy fringing the watercourse and most of the northern side of this section with tree heights averaging around 8m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 20 SP (70,0,30,0) Quaternary point (green) near Tower 38
(539.100m between towers 37-38)

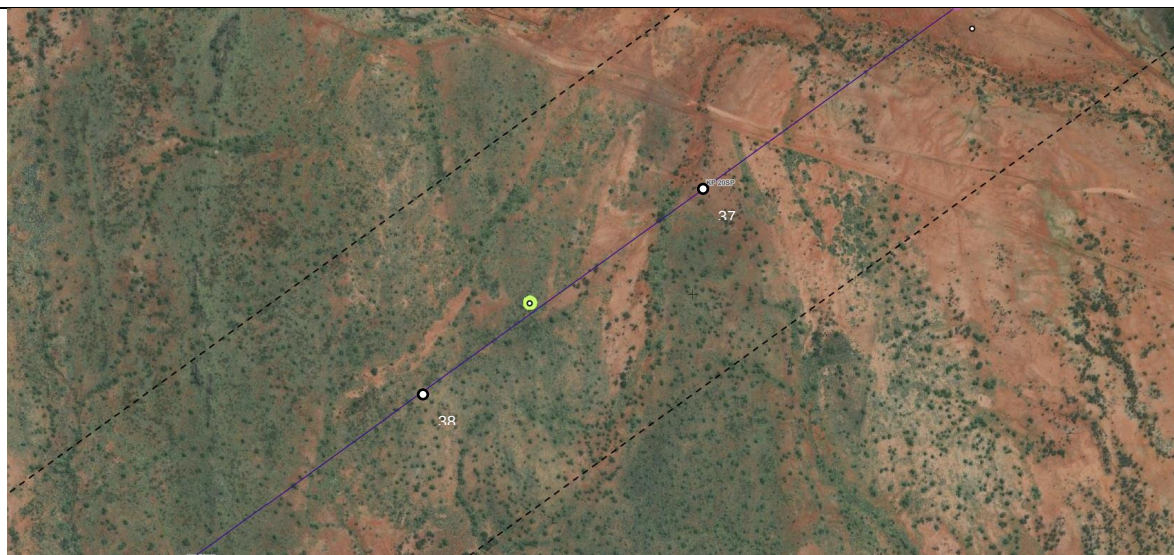

This section is described as 70% very light, 0% light, 30% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers scattered small patches along this section with tree heights averaging at 6m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 33 SP (50,0,50,0) Quaternary point (green) near Tower 61
(581.622m between towers 60-61)




This section is described as 50% very light, 0% light, 50% moderate and 0% heavy by the clearing contractor. Field observations show a mid-dense canopy covers scattered small patches along this section with tree heights averaging at 7m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 39.3 SP (90,0,10,0) Quaternary point (green) near Tower 72
(499.548m between towers 71-72)



This section is described as 90% very light, 0% light, 10% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is very sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 42.1 SP (40,0,60,0) Riparian zone (red) near Tower 77
 (487.275m between towers 76-77) (Moderate Risk (Amber) DAF – WWBW)

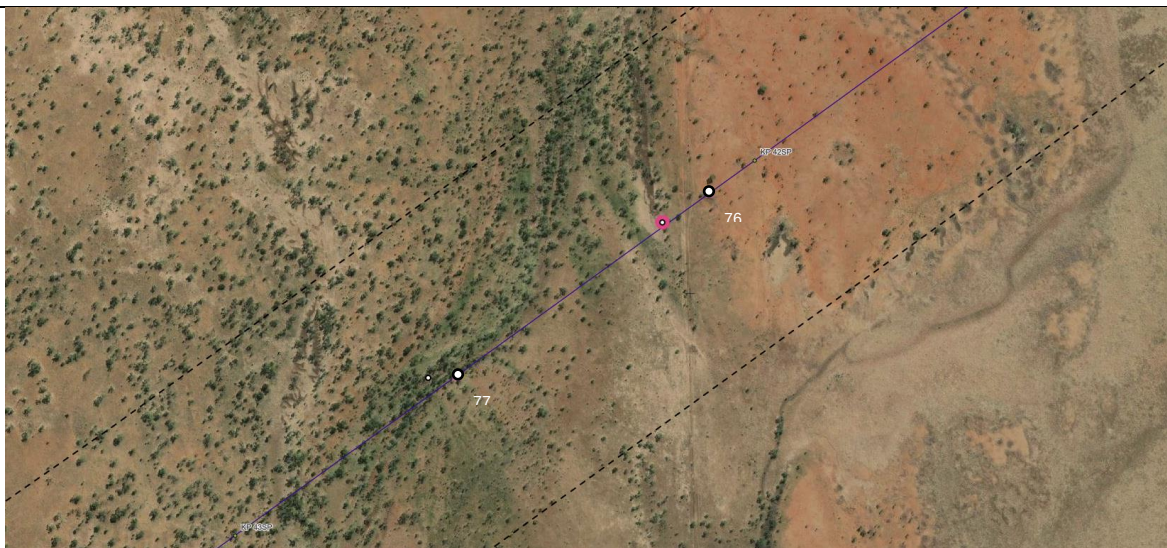

This section is described as 40% very light, 0% light, 60% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 1m wide braided watercourse. Tree heights ranged up to 8m. The mid-dense canopy covers the riparian canopies that fringe the watercourses and most of the middle section with tree heights averaging around 8m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 43.5 SP (40,10,40,10) Riparian zone (red) near Tower 80
 (580.103m between towers 79-80) (Major Risk (Purple) DAF – WWBW)



This section is described as 40% very light, 10% light, 40% moderate and 10% heavy by the clearing contractor. Field observations show a riparian woodland along a 120m and 15m wide braided watercourses. Tree heights ranged up to 18m. The very sparse canopy covers the riparian canopies that fringe the watercourses and most of the middle section with tree heights averaging around 8m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 45.9 SP (95,5,0,0) Quaternary point (green) near Tower 84
(587.228m between towers 83-84)




This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is very sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 53.9 SP (95,5,0,0) Riparian zone (red) near Tower 98
 (589.557m between towers 97-98) (Moderate Risk (Amber) DAF – WWBW)




This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 11m wide watercourse. Tree heights ranged up to 9m. The very sparse canopy covers the riparian canopy fringing the watercourse with tree heights averaging around 3m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 56.2 SP (95,5,0,0) Access track (yellow) near Tower 102
(550.263m between towers 101-102)

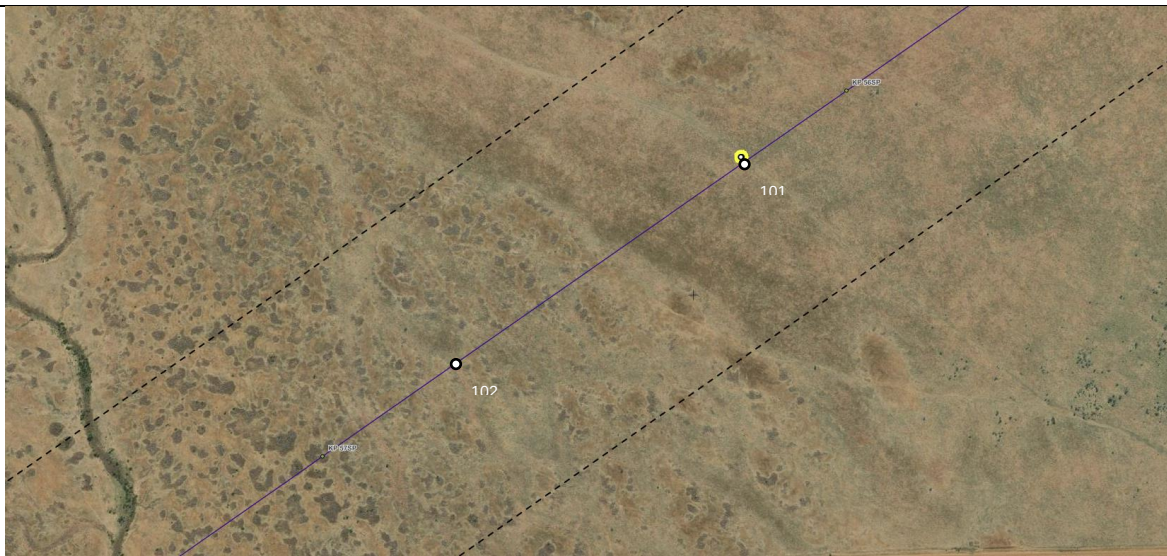

This section is described as 95% very light, 5% light, 0% moderate and 0% heavy by the clearing contractor. Field observations in this section shows canopy coverage is very sparse or absent. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 59 SP (50,0,50,0) Quaternary point (green) near Tower 107
(502.746m between towers 106-107)

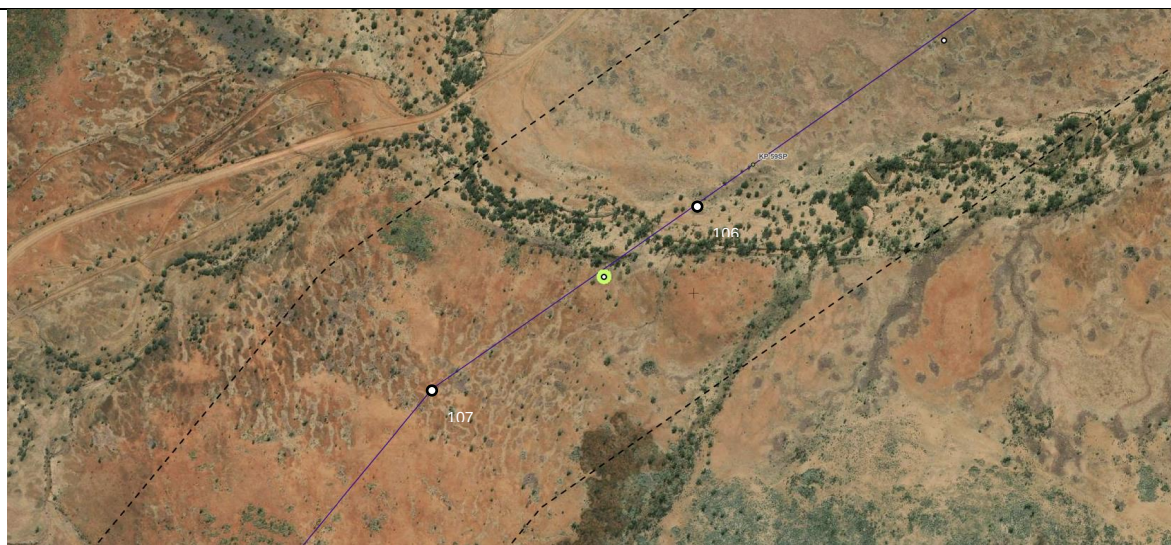

This section is described as 50% very light, 0% light, 50% moderate and 0% heavy by the clearing contractor. Field observations show a riparian woodland along a 10m wide watercourse north of the quaternary point. The mid-dense canopy covers the riparian canopy that fringes the watercourse with tree heights averaging at 9m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.

Line 5 KP 61.9 SP (70,30,0,0) Quaternary point (green) near Tower 112
(522.347m between towers 111-112)



This section is described as 70% very light, 30% light, 0% moderate and 0% heavy by the clearing contractor. Field observations show a sparse canopy covers small patches near both towers with tree heights averaging at 5m. Observations on the ground reflect the clearing contractor's description within this section of the alignment.